

Gun Drill


INDEXABLE



Indexable gundrills ensures reliable deep hole drilling
at accelerated feeds and speeds


Unitec indexable Gun Drill with exceptional efficiency now offers **smaller diameters**

Wide range of solutions for various deep hole applications

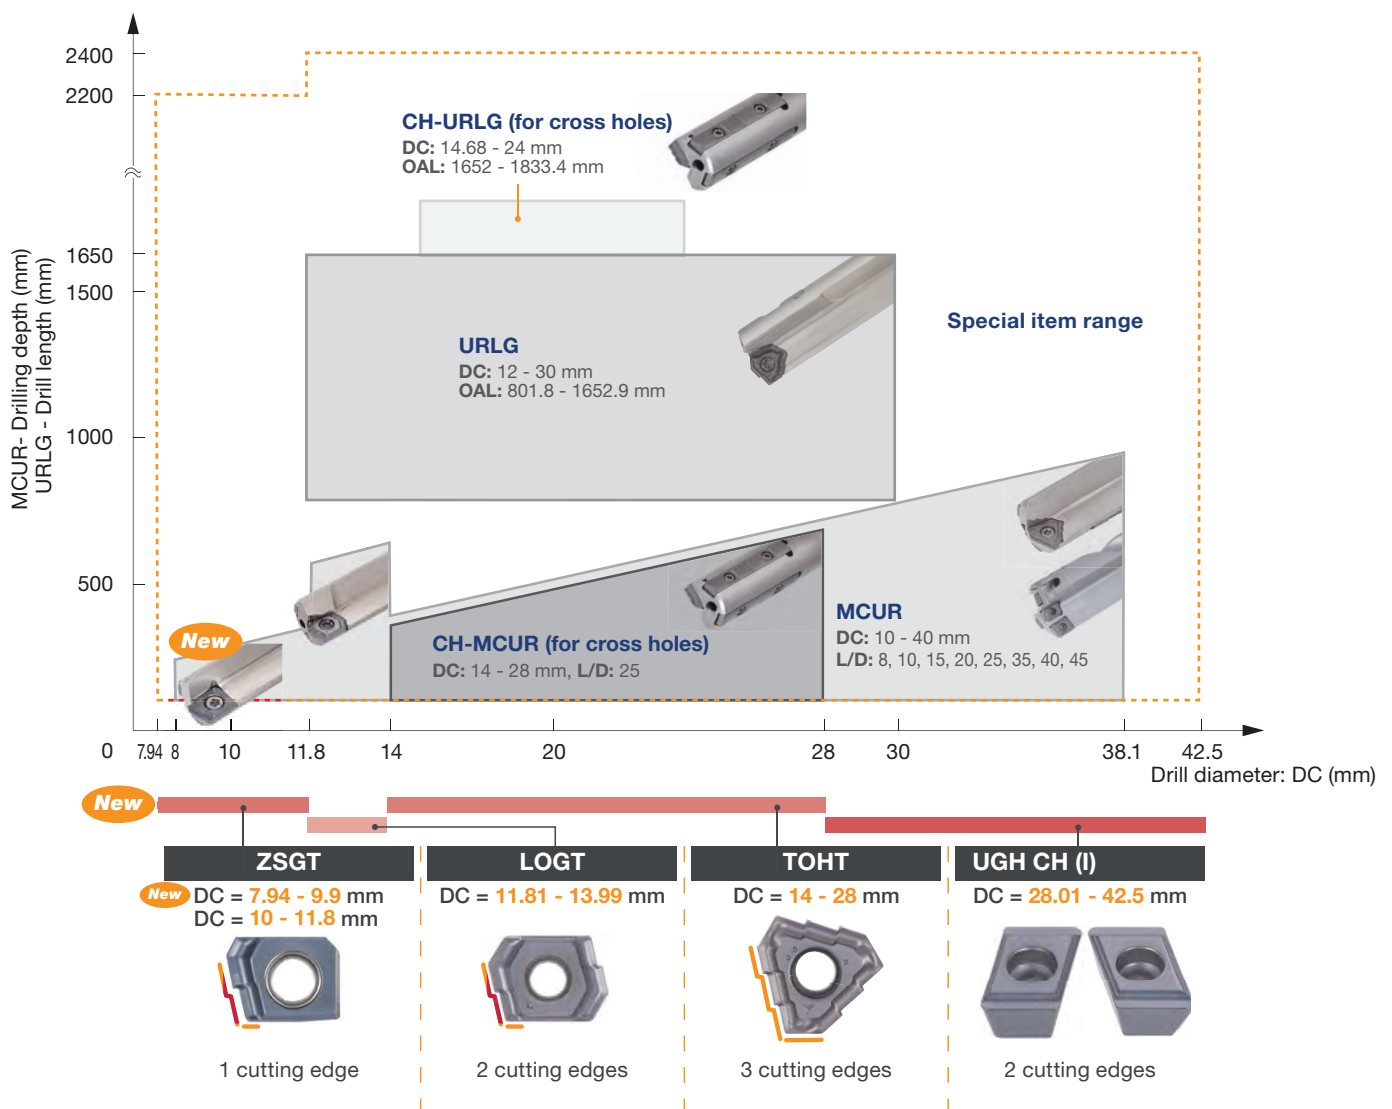

MCUR L/D=10

Indexable gundrill, L/D = 10, for lathes and machining centers

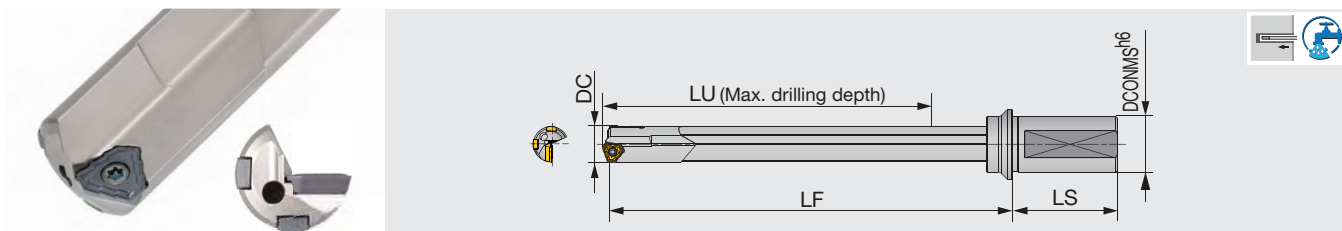


Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
MCUR16.00XM25A-10	16	25	172.2	56	209	TOHT08...	GP05-075, GP05-18-075-DC
MCUR16.50XM25A-10	16.5	25	172.2	56	209	TOHT08...	GP05-075, GP05-18-075-DC
MCUR17.00XM25A-10	17	25	182.2	56	220	TOHT08...	GP05-075, GP05-18-075-DC
MCUR17.45XU25.4A-10	17.45	25.4	182.2	56	220	TOHT08..	GP05-075, GP05-18-075-DC
MCUR18.00XM25A-10	18	25	192.2	56	232	TOHT08...	GP05-075, GP05-18-075-DC
MCUR18.24XU25.4-10	18.24	25.4	193	56	232	TOHT09..	GP06-085, GP06-20-085-DC
MCUR18.64XU25.4-10	18.64	25.4	193	56	232	TOHT09..	GP06-085, GP06-20-085-DC
MCUR19.00XM25-10	19	25	203	56	243	TOHT09...	GP06-085, GP06-20-085-DC
MCUR19.05XU25.4-10	19.05	25.4	203	56	243	TOHT09..	GP06-085, GP06-20-085-DC
MCUR19.94XU31.75-10	19.94	31.75	213	60	255	TOHT09..	GP06-085, GP06-20-085-DC
MCUR20.00XM32-10	20	32	213	60	255	TOHT09...	GP06-085, GP06-20-085-DC
MCUR20.62XU31.75-10	20.62	31.75	213.2	60	255	TOHT10..	GP06-085, GP06-20-085-DC
MCUR21.00XM32-10	21	32	223.2	60	266	TOHT10...	GP06-085, GP06-20-085-DC
MCUR22.00XM32-10	22	32	233.4	60	278	TOHT11...	GP06-100, GP06-20-100-DC
MCUR22.23XU31.75-10	22.23	31.75	233.4	60	278	TOHT11..	GP06-100, GP06-20-100-DC
MCUR23.00XM32-10	23	32	243.4	60	289	TOHT11...	GP06-100, GP06-20-100-DC
MCUR23.80XU31.75-10	23.8	31.75	253.4	60	301	TOHT11..	GP06-100, GP06-20-100-DC
MCUR24.00XM32-10	24	32	253.4	60	301	TOHT11...	GP06-100, GP06-20-100-DC
MCUR25.00XM32-10	25	32	263.4	60	312	TOHT11...	GP06-100, GP06-20-100-DC
MCUR25.40XU31.75-10	25.4	31.75	263.7	60	312	TOHT12..	GP06, GP06-20-120-DC
MCUR26.00XM40-10	26	40	273.7	70	324	TOHT12...	GP06, GP06-20-120-DC
MCUR26.97XU31.75X-10	26.97	31.75	283.7	60	335	TOHT12..	GP06, GP06-20-120-DC
MCUR27.00XM40-10	27	40	283.7	70	335	TOHT12...	GP06, GP06-20-120-DC
MCUR28.00XM40-10	28	40	283.7	70	337	TOHT12...	GP06, GP06-20-120-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
16 - 28	0 / - 0.07	+ 0.05 / - 0.1

MCUR L/D=20

Indexable gundrill, L/D = 20, for lathes and machining centers

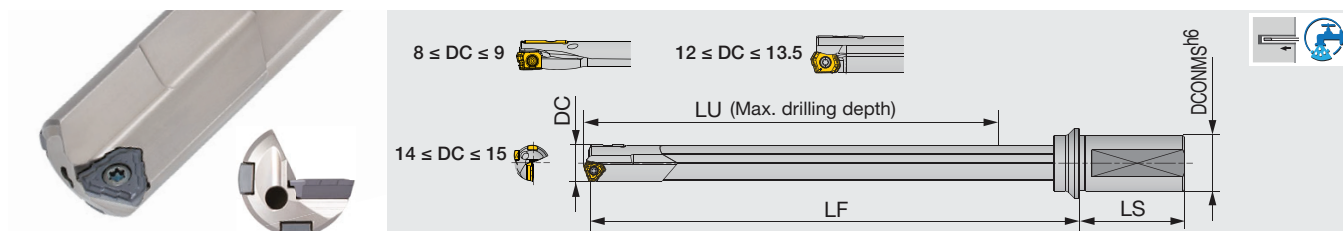

Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
MCUR12.00XM20-20	12	20	261.8	50	290	LOGT06...	GP04-055, GP04-16-055-DC
MCUR12.50XM20-20	12.5	20	261.8	50	291	LOGT06...	GP04-055, GP04-16-055-DC
MCUR13.00XM25-20	13	25	281.8	56	315	LOGT06...	GP04-055, GP04-16-055-DC
MCUR13.50XM25-20	13.5	25	281.8	56	315	LOGT06...	GP04-055, GP04-16-055-DC
MCUR14.00XM25-20	14	25	302	56	336	TOHT07...	GP05-060, GP05-18-060-DC
MCUR14.50XM25-20	14.5	25	302	56	337	TOHT07...	GP05-060, GP05-18-060-DC
MCUR15.00XM25-20	15	25	322	56	358	TOHT07...	GP05-060, GP05-18-060-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
12 - 13.99	0 / - 0.08	+ 0.05 / - 0.11
14 - 15	0 / - 0.07	+ 0.05 / - 0.1

SPARE PARTS

Designation	Insert		Guide pad	
	Screw	Wrench	Screw	Wrench
MCUR12... - MCUR13.5...	SR10503833L040	T-7F	CSPB-2L043	IP-6F
MCUR14... - MCUR15...	SR14-560/S	T-8F	SR34-508	T-7F

Recommended torque (N·m) for clamping: CSPB-2FL3.1, CSPB-2FL2.7-LH=0.6, SR10503833L040=1.3, CSPB-2L043=0.7, SR14-560/S=1.2, SR34-508=0.9

Screws for inserts


CSPB-2FL3.1

Screws for guide pads

CSPB-2FL2.7-LH


Caution

Color of screws and its tightening direction are different for inserts and guide pads.
($\phi 7.94 \leq \phi DC < \phi 8.5$)

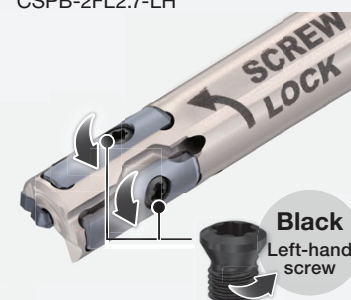

MCUR L/D=25

Indexable gundrill, L/D = 25, for lathes and machining centers

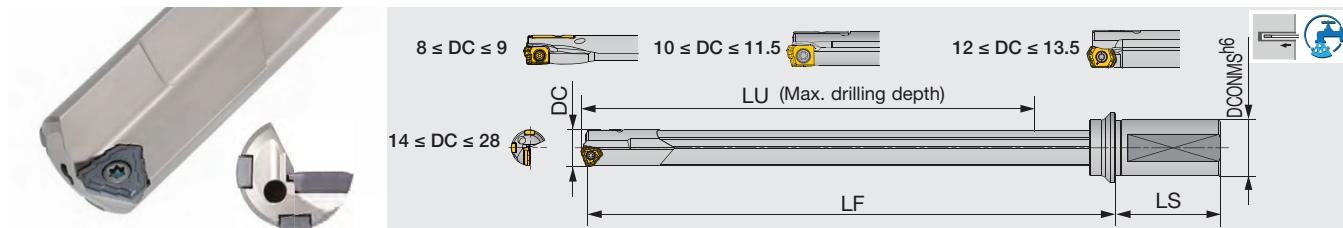


	Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
New	MCUR08.00XM20-25	8	20	211.2	50	234	ZSGT04...	SGP03-12-035-DC
New	MCUR08.50XM20-25	8.5	20	218.7	50	242.5	ZSGT04...	SGP03-12-040-DC
New	MCUR09.00XM20-25	9	20	236.1	50	261	ZSGT05...	SGP03-12-040-DC
	MCTR10.00XM20-25	10	20	264.2	50	289.5	ZSGT06...	GP04-16-045-DC
	MCUR11.00XM20-25	11	20	301.7	50	329	ZSGT06...	GP04-16-050-DC
	MCUR11.50XM20-25	11.5	20	301.7	50	329	ZSGT06...	GP04-16-050-DC
	MCUR12.00XM20-25	12	20	326.8	50	355	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR12.50XM20-25	12.5	20	326.8	50	356	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR12.70XU25.4-25	12.7	25.4	326.8	56	359	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR13.00XM25-25	13	25	351.8	56	385	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR13.49XU25.4-25	13.49	25.4	351.8	56	385	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR13.50XM25-25	13.5	25	351.8	56	385	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR14.00XM25-25	14	25	377	56	411	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR14.27XU25.4-25	14.27	25.4	377	56	411	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR14.50XM25-25	14.5	25	377	56	412	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR15.00XM25-25	15	25	402	56	438	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR15.88XU25.4-25	15.88	25.4	402	56	439	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR16.00XM25A-25	16	25	427.2	56	464	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR16.50XM25A-25	16.5	25	427.2	56	464	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR17.00XM25A-25	17	25	452.2	56	490	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR17.45XU25.4A-25	17.45	25.4	452.2	56	490	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR17.50XM25A-25	17.5	25	452.2	56	490	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR18.00XM25A-25	18	25	477.2	56	517	TOHT08...	GP05-075, GP05-18-075-DC
	MCUR18.24XU25.4-25	18.24	25.4	478	56	517	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR18.50XM25-25	18.5	25	478	56	517	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR18.64XU25.4-25	18.64	25.4	478	56	517	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR19.00XM25-25	19	25	503	56	543	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR19.05XU25.4-25	19.05	25.4	503	56	543	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR19.50XM25-25	19.5	25	503	56	543	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR19.94XU31.75-25	19.94	31.75	528	60	570	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR20.00XM32-25	20	32	528	60	570	TOHT09...	GP06-085, GP06-20-085-DC
	MCUR20.62XU31.75-25	20.62	31.75	528.2	60	570	TOHT10...	GP06-085, GP06-20-085-DC
	MCUR21.00XM32-25	21	32	553.2	60	596	TOHT10...	GP06-085, GP06-20-085-DC
	MCUR22.00XM32-25	22	32	578.4	60	623	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR22.23XU31.75-25	22.23	31.75	578.4	60	623	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR23.00XM32-25	23	32	603.4	60	649	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR23.80XU31.75-25	23.8	31.75	628.4	60	676	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR24.00XM32-25	24	32	628.4	60	676	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR25.00XM32-25	25	32	653.4	60	702	TOHT11...	GP06-100, GP06-20-100-DC
	MCUR25.40XU31.75-25	25.4	31.75	653.7	60	702	TOHT12...	GP06, GP06-20-120-DC
	MCUR26.00XM40-25	26	40	678.7	70	729	TOHT12...	GP06, GP06-20-120-DC
	MCUR26.97XU31.75X-25	26.97	31.75	703.7	60	755	TOHT12...	GP06, GP06-20-120-DC
	MCUR27.00XM40-25	27	40	703.7	70	755	TOHT12...	GP06, GP06-20-120-DC
	MCUR28.00XM40-25	28	40	703.7	70	757	TOHT12...	GP06, GP06-20-120-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
10 - 13.99	0 / - 0.08	+ 0.05 / - 0.11
14 - 28	0 / - 0.07	+ 0.05 / - 0.1

MCUR L/D=35, 40, 45

Indexable gundrill, L/D = 35, 40, 45, for lathes and machining centers

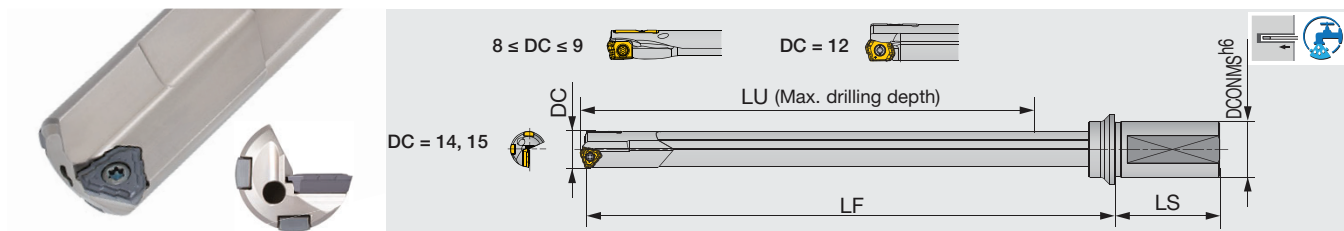

	Designation	DC	L/D	DCONMS	LU	LS	LF	Insert	Guide pad
New	MCUR08.00XM20-45	8	45	20	379.2	50	402	ZSGT04...	SGP03-12-035-DC
New	MCUR08.50XM20-40	8.5	40	20	349.2	50	373	ZSGT04...	SGP03-12-040-DC
New	MCUR09.00XM20-40	9	40	20	377.1	50	402	ZSGT05...	SGP03-12-040-DC
	MCUR12.00XM20-35	12	35	20	456.8	50	485	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR12.00XM20-40	12	40	20	521.8	50	550	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR12.00XM20-45	12	45	20	586.8	50	615	LOGT06...	GP04-055, GP04-16-055-DC
	MCUR14.00XM25-35	14	35	25	527	56	561	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR14.00XM25-40	14	40	25	602	56	636	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR15.00XM25-35	15	35	25	562	56	598	TOHT07...	GP05-060, GP05-18-060-DC
	MCUR15.00XM25-40	15	40	25	642	56	678	TOHT07...	GP05-060, GP05-18-060-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
12 - 13.99	0 / - 0.08	+ 0.05 / - 0.11
14 - 15	0 / - 0.07	+ 0.05 / - 0.1

SPARE PARTS

	Designation	Insert		Guide pad	
		Screw	Wrench	Screw	Wrench
New	zzz08...	CSPB-2FL3.1	IP-6F	CSPB-2FL2.7-LH	IP-6F
New	MCUR08.5..., MCUR09...	CSPB-2FL3.1	IP-6F	CSPB-2FL3.1	IP-6F
	MCUR10... - MCUR11.5...	SR-M2.5X0.35L3.8	T-7F	CSTB-2	T-6F
	MCUR12... - MCUR13.5...	SR10503833L040	T-7F	CSPB-2L043	IP-6F
	MCUR14... - MCUR20...	SR14-560/S	T-8F	SR34-508	T-7F
	MCUR20.62... - MCUR21...	SR34-506	T-9F	SR34-508	T-7F
	MCUR22... - MCUR25...	SR14-571/S	T-10/5	SR34-508	T-7F
	MCUR25.4... - MCUR28...	SR14-506	T-15F	SR34-508	T-7F

Recommended torque (N·m) for clamping: CSPB-2FL3.1, CSPB-2FL2.7-LH=0.6, SR-M2.5X0.35L3.8=0.9, CSTB-2=0.7, SR10503833L040=1.3, CSPB-2L043=0.7, SR14-560/S=1.2, SR34-508=0.9, SR34-506=0.9, SR14-571/S=3.2, SR14-506=4.8

**Caution**


Color of screws and its tightening direction are different for inserts and guide pads.
($\varnothing 7.94 \leq \varnothing DC < \varnothing 8.5$)

Screws for inserts

CSPB-2FL3.1


**Screws for guide pads**

CSPB-2FL2.7-LH

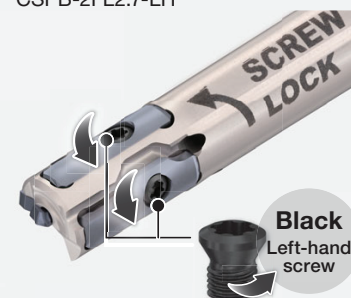

CH-MCUR L/D=25, 40, 45

Indexable gundrill, L/D = 25, 40, 45 for drilling cross hole applications on CNC lathes and machining centers

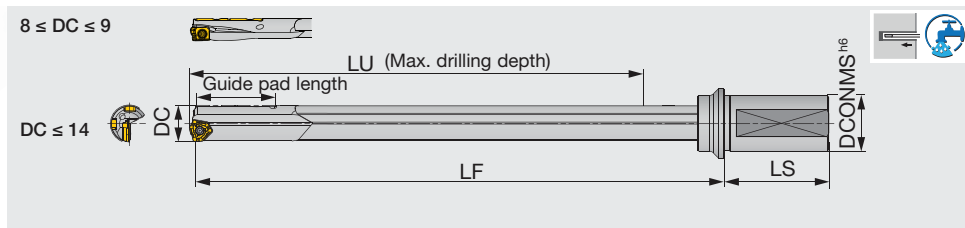

	Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad	Guide pad length
New	CH-MCUR08.00XM20-25	8	20	211.2	50	234	ZSGT04...	SGP03-12-035-DC	24
New	CH-MCUR08.00XM20-45	8	20	379.2	50	402	ZSGT04...	SGP03-12-035-DC	24
New	CH-MCUR08.50XM20-25	8.5	20	218.7	50	242.5	ZSGT04...	SGP03-12-040-DC	24
New	CH-MCUR08.50XM20-40	8.5	20	349.2	50	373	ZSGT04...	SGP03-12-040-DC	24
	CH-MCUR14.00XM25-25	14	25	377	56	411	TOHT07...	GP05-060, GP05-18-060-DC	36
	CH-MCUR14.68XU25.4-25	14.68	25.4	377	56	412	TOHT07...	GP05-060, GP05-18-060-DC	36
	CH-MCUR15.00XM25-25	15	25	402	56	438	TOHT07...	GP05-060, GP05-18-060-DC	36
	CH-MCUR15.06XU25.4-25	15.06	25.4	402	56	438	TOHT07...	GP05-060, GP05-18-060-DC	36
	CH-MCUR16.00XM25A-25	16	25	427.2	56	464	TOHT08...	GP05-075, GP05-18-075-DC	36
	CH-MCUR18.00XM25A-25	18	25	477.2	56	517	TOHT08...	GP05-075, GP05-18-075-DC	36
	CH-MCUR18.24XU25.4-25	18.24	25.4	478	56	517	TOHT09...	GP06-085, GP06-20-085-DC	40
	CH-MCUR18.64XU25.4-25	18.64	25.4	478	56	517	TOHT09...	GP06-085, GP06-20-085-DC	40
	CH-MCUR19.00XM25-25	19	25	503	56	543	TOHT09...	GP06-085, GP06-20-085-DC	40
	CH-MCUR20.00XM32-25	20	32	528	60	570	TOHT09...	GP06-085, GP06-20-085-DC	40
	CH-MCUR23.00XM32-25	23	32	603.4	60	649	TOHT11...	GP06-100, GP06-20-100-DC	40
	CH-MCUR23.80XU31.75-25	23.8	31.75	628.4	60	676	TOHT11...	GP06-100, GP06-20-100-DC	40
	CH-MCUR24.00XM32-25	24	32	628.4	60	676	TOHT11...	GP06-100, GP06-20-100-DC	40
	CH-MCUR28.00XM40-25	28	40	703.7	70	757	TOHT12...	GP06, GP06-20-120-DC	40



DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
8 - 8.5	0 / - 0.1	+ 0.05 / - 0.14
14 - 28	0 / - 0.09	+ 0.05 / - 0.12

SPARE PARTS

Designation	Insert		Guide pad	
	Screw	Wrench	Screw	Wrench
CH-MCUR08...	CSPB-2FL3.1	IP-6F	CSPB-2FL2.7-LH	IP-6F
CH-MCUR14... - CH-MCUR20...	SR14-560/S	T-8F	SR34-508	T-7F
CH-MCUR23... - CH-MCUR24...	SR14-571/S	T-10/5	SR34-508	T-7F
CH-MCUR28...	SR14-506	T-15F	SR34-508	T-7F

Recommended torque (N·m) for clamping: CSPB-2FL3.1, CSPB-2FL2.7-LH=0.6, SR34-508=0.9, SR14-560/S=1.2, SR14-571/S=3.2, SR14-506=4.8


Tool selection with regard to cross hole diameters and drill diameters

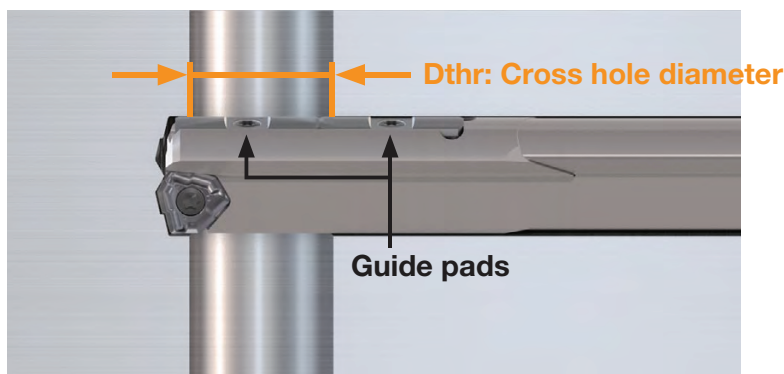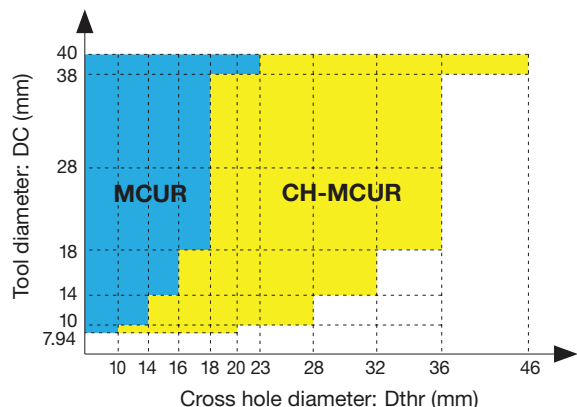

Note: An MCUR drill can be used when the cross hole diameter (Dthr) is smaller than the drill's guide pad length. When the cross hole diameter is larger than the drill's guide pad length, use an CH-MCUR drill.

MCUR-F L/D=8

Indexable gundrill, L/D = 8, for lathes and machining centers

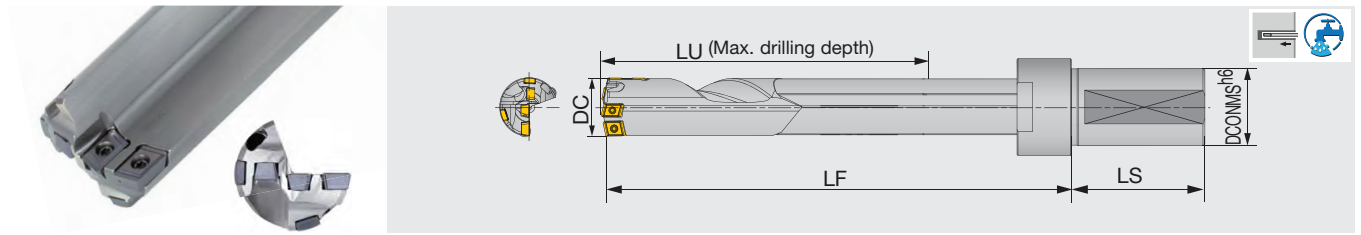

Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
MCUR33.10XFM40-8	33.1	40	275	69	350	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR39.10XFM40-8	39.1	40	323	69	407	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC


DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
33.1, 39.1	0 / - 0.07	+ 0.05 / - 0.1

Caution:

The drill pipe is blackened to increase the resistance to corrosion, and the finished surface may appear uneven. This, however, will not affect the performance of the drill.

MCUR-F L/D=10

Indexable gundrill, L/D = 10, for lathes and machining centers

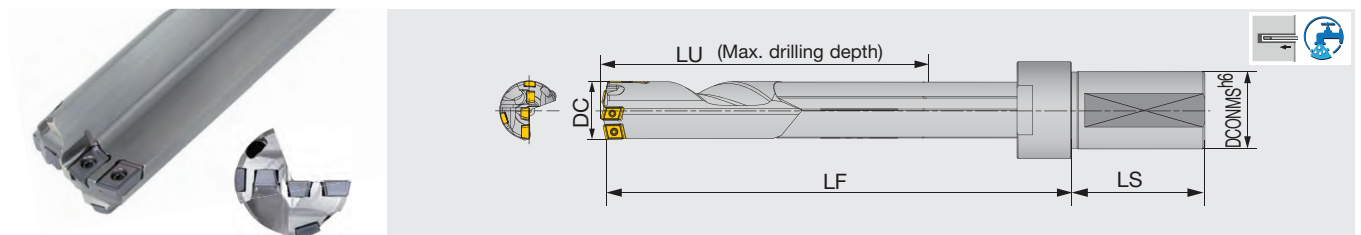

Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
MCUR28.58XFU31.75-10	28.58	31.75	292.6	69	360	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
MCUR29.00XFM40-10	29	40	292.6	69	360	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
MCTR30.00XFM40-10	30	40	312.9	69	38	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR31.00XFM40-10	31	40	312.9	69	383	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR31.75XFU31.75-10	31.75	31.75	323	69	395	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCTR32.00XFM40-10	32	40	323	69	395	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCTR33.00XFM40-10	33	40	333.1	69	406	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCTR34.00XFM40-10	34	40	343	69	418	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR34.93XFU31.75-10	34.93	31.75	353.1	69	428	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR35.00XFM40-10	35	40	353.1	69	428	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR36.00XFM40-10	36	40	363.1	69	441	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCTR37.00XFM40-10	37	40	373	69	451	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR38.00XFM40-10	38	40	383.1	69	464	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR38.10XFU31.75-10	38.1	31.75	393.4	69	474	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC
MCUR39.00XFM40-10	39	40	393.4	69	474	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC
MCUR40.00XFM40-10	40	40	403.3	69	487	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC


DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
28.58 - 40	0 / - 0.07	+ 0.05 / - 0.1

Caution:

The drill pipe is blackened to increase the resistance to corrosion, and the finished surface may appear uneven. This, however, will not affect the performance of the drill.

MCUR-F L/D=15, 25

Indexable gundrill, L/D = 15, 25 for lathes and machining centers

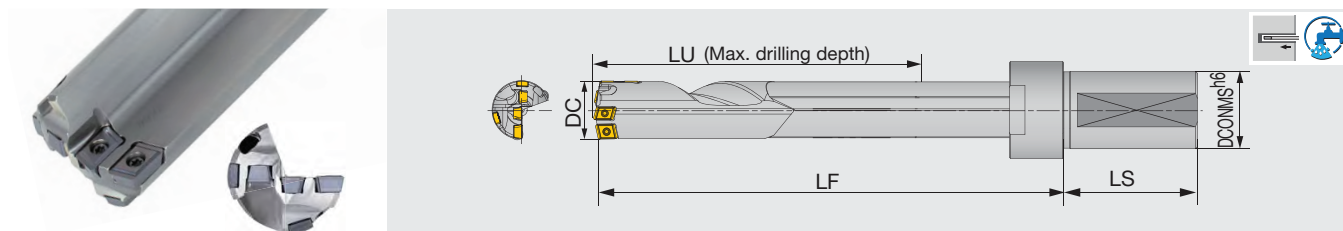

Designation	DC	DCONMS	LU	LS	LF	Insert	Guide pad
MCUR28.58XFU31.75-155	28.5	31.75	437.6	69	50	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
MCUR28.58XFU31.75-25	28.58	31.75	727.6	69	795	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
MCUR29.00XFM40-15	29	40	437.6	69	505	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
MCUR30.00XFM40-15	30	40	467.9	69	538	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR30.00XFM40-25	30	40	777.9	69	848	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR31.00XFM40-15	31	40	467.9	69	538	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR31.75XFU31.75-15	31.75	31.75	483	69	555	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR31.75XFU31.75-25	31.75	31.75	803	69	875	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR32.00XFM40-15	32	40	483	69	555	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR33.00XFM40-15	33	40	498.1	69	571	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
MCUR34.00XFM40-15	34	40	513	69	588	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR34.93XFU31.75-15	34.93	31.75	528.1	69	603	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR34.93XFU31.75-25	34.93	31.75	878.1	69	953	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR35.00XFM40-15	35	40	528.1	69	603	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR36.00XFM40-15	36	40	543.1	69	621	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR37.00XFM40-15	37	40	558	69	636	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR38.00XFM40-15	38	40	573.1	69	654	NPMT08**-C, NPMT07**-I, NPHT08**-P	GP07, GP07-20-120-DC
MCUR38.10XFU31.75-15	38.1	31.75	588.4	69	669	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC
MCUR38.10XFU31.75-25	38.1	31.75	978.4	69	1059	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC
MCUR39.00XFM40-15	39	40	588.4	69	669	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC
MCUR40.00XFM40-15	40	40	603.3	69	687	NPMT08**-C, NPMT07**-I, NPHT09**-P	GP08, GP08-25-155-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
28.58 - 40	0 / - 0.07	+ 0.05 / - 0.1

Caution:

The drill pipe is blackened to increase the resistance to corrosion, and the finished surface may appear uneven. This, however, will not affect the performance of the drill.


SPARE PARTS

Designation	Insert						Guide pad	
	Central		Intermediate		Peripheral		Screw	Wrench
MCUR28.58... - MCUR29...	Screw	Wrench	Screw	Wrench	Screw	Wrench	SR34-508	T-7F
MCUR30... - MCUR33...	Screw	T-8F	Screw	T-8F	Screw	T-8F	SR34-508	T-7F
MCUR33.1... - MCUR40...	Screw	T-8F	Screw	T-8F	Screw	T-8F	CSTB-3S	T-9F

Recommended torque (N·m) for clamping: CSTB-2.5=1.3, CSTB-2.2=1, SR34-508=0.9, CSTB-3S=2.3

URLG

Indexable gundrill for gundrilling machines

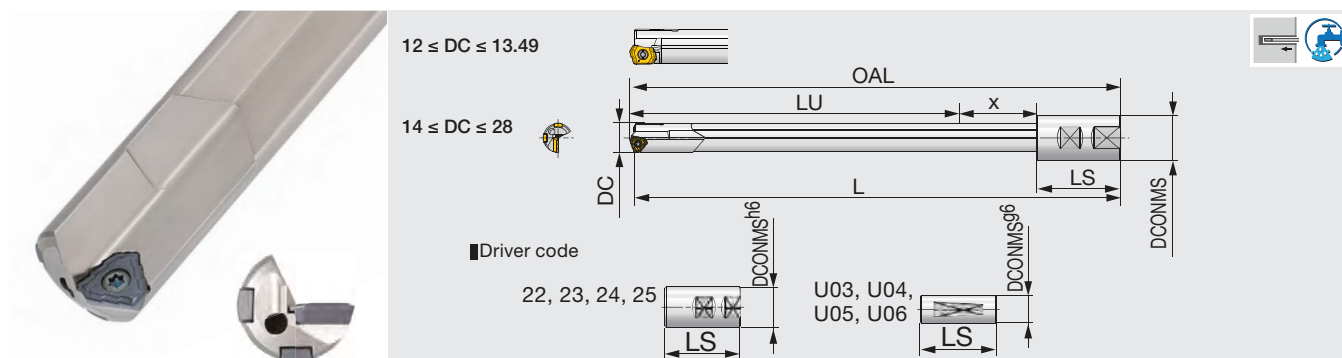

Designation	DC	L	DCONMS	LU	OAL	LS	x	Driver code	Insert	Guide pad
URLG12.00X800-U03	12	800	19.05	713.8	801.8	70	18	U03	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.00X800-22	12	800	20	733.8	801.8	50	18	22	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.00X1000-U03	12	1000	19.05	913.8	1001.8	70	18	U03	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.00X1000-22	12	1000	20	933.8	1001.8	50	18	22	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.00X1650-U03	12	1650	19.05	1563.8	1651.8	70	18	U03	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.00X1650-22	12	1650	20	1583.8	1651.8	50	18	22	LOGT06...	GP04-055, GP04-16-055-DC
URLG12.70X1219-U04	12.7	1219	25.4	1131.8	1220.8	70	19	U04	LOGT06..	GP04-055, GP04-16-055-DC
URLG12.70X1524-U04	12.7	1524	25.4	1436.8	1525.8	70	19	U04	LOGT06..	GP04-055, GP04-16-055-DC
URLG13.00X800-U04	13	800	25.4	711.8	801.8	70	20	U04	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.00X800-23	13	800	25	725.8	801.8	56	20	23	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.00X1000-U04	13	1000	25.4	911.8	1001.8	70	20	U04	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.00X1000-23	13	1000	25	925.8	1001.8	56	20	23	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.00X1650-U04	13	1650	25.4	1561.8	1651.8	70	20	U04	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.00X1650-23	13	1650	25	1575.8	1651.8	56	20	23	LOGT06...	GP04-055, GP04-16-055-DC
URLG13.49X1219-U04	13.49	1219	25.4	1130.8	1220.8	70	20	U04	LOGT06..	GP04-055, GP04-16-055-DC
URLG13.49X1527-U04	13.49	1527	25.4	1438.8	1528.8	70	20	U04	LOGT06..	GP04-055, GP04-16-055-DC
URLG14.00X800-23	14	800	25	725	802	56	21	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.00X800-U04	14	800	25.4	711	802	70	21	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.00X1000-23	14	1000	25	925	1002	56	21	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.00X1000-U04	14	1000	25.4	911	1002	70	21	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.00X1650-23	14	1650	25	1575	1652	56	21	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.00X1650-U04	14	1650	25.4	1561	1652	70	21	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X800-23	14.5	800	25	724	802	56	22	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X800-U04	14.5	800	25.4	710	802	70	22	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X1000-23	14.5	1000	25	924	1002	56	22	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X1000-U04	14.5	1000	25.4	910	1002	70	22	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X1650-23	14.5	1650	25	1574	1652	56	22	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG14.50X1650-U04	14.5	1650	25.4	1560	1652	70	22	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X800-23	15	800	25	723	802	56	23	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X800-U04	15	800	25.4	709	802	70	23	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X1000-23	15	1000	25	923	1002	56	23	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X1000-U04	15	1000	25.4	909	1002	70	23	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X1650-23	15	1650	25	1573	1652	56	23	23	TOHT07...	GP05-060, GP05-18-060-DC
URLG15.00X1650-U04	15	1650	25.4	1559	1652	70	23	U04	TOHT07...	GP05-060, GP05-18-060-DC
URLG16.00X800-23A	16	800	25	722.2	802.2	56	24	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG16.00X800-U04A	16	800	25.4	708.2	802.2	70	24	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG16.00X1000-23A	16	1000	25	922.2	1002.2	56	24	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG16.00X1000-U04A	16	1000	25.4	908.2	1002.2	70	24	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG16.00X1500-23A	16	1500	25	1422.2	1502.2	56	24	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG16.00X1500-U04A	16	1500	25.4	1408.2	1502.2	70	24	U04	TOHT08...	GP05-075, GP05-18-075-DC

Designation	DC	L	DCONMS	LU	OAL	LS	x	Driver code	Insert	Guide pad
URLG17.00X800-23A	17	800	25	721.2	802.2	56	25	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG17.00X800-U04A	17	800	25.4	707.2	802.2	70	25	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG17.00X1000-23A	17	1000	25	921.2	1002.2	56	25	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG17.00X1000-U04A	17	1000	25.4	907.2	1002.2	70	25	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X800-23A	18	800	25	719.2	802.2	56	27	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X800-U04A	18	800	25.4	705.2	802.2	70	27	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X1000-23A	18	1000	25	919.2	1002.2	56	27	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X1000-U04A	18	1000	25.4	905.2	1002.2	70	27	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X1500-23A	18	1500	25	1419.2	1502.2	56	27	23	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.00X1500-U04A	18	1500	25.4	1405.2	1502.2	70	27	U04	TOHT08...	GP05-075, GP05-18-075-DC
URLG18.50X1500-23	18.5	1500	25	1420	1503	56	27	23	TOHT09...	GP06-085, GP06-20-085-DC
URLG18.50X1500-U04	18.5	1500	25.4	1406	1503	70	27	U04	TOHT09...	GP06-085, GP06-20-085-DC
URLG19.00X800-23	19	800	25	719	803	56	28	23	TOHT09...	GP06-085, GP06-20-085-DC
URLG19.00X800-U04	19	800	25.4	705	803	70	28	U04	TOHT09...	GP06-085, GP06-20-085-DC
URLG19.00X1000-23	19	1000	25	919	1003	56	28	23	TOHT09...	GP06-085, GP06-20-085-DC
URLG19.00X1000-U04	19	1000	25.4	905	1003	70	28	U04	TOHT09...	GP06-085, GP06-20-085-DC
URLG20.00X800-24	20	800	32	713	803	60	30	24	TOHT09...	GP06-085, GP06-20-085-DC
URLG20.00X800-U05	20	800	31.75	703	803	70	30	U05	TOHT09...	GP06-085, GP06-20-085-DC
URLG20.00X1000-24	20	1000	32	913	1003	60	30	24	TOHT09...	GP06-085, GP06-20-085-DC
URLG20.00X1000-U05	20	1000	31.75	903	1003	70	30	U05	TOHT09...	GP06-085, GP06-20-085-DC
URLG21.00X1000-24	21	1000	32	912.2	1003.2	60	31	24	TOHT10...	GP06-085, GP06-20-085-DC
URLG21.00X1000-U05	21	1000	31.75	902.2	1003.2	70	31	U05	TOHT10...	GP06-085, GP06-20-085-DC
URLG22.00X1000-24	22	1000	32	910.4	1003.4	60	33	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG22.00X1000-U05	22	1000	31.75	900.4	1003.4	70	33	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG22.00X1500-24	22	1500	32	1410.4	1503.4	60	33	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG22.00X1500-U05	22	1500	31.75	1400.4	1503.4	70	33	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG23.00X1000-24	23	1000	32	909.4	1003.4	60	34	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG23.00X1000-U05	23	1000	31.75	899.4	1003.4	70	34	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG23.00X1500-24	23	1500	32	1409.4	1503.4	60	34	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG23.00X1500-U05	23	1500	31.75	1399.4	1503.4	70	34	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG24.00X1000-24	24	1000	32	907.4	1003.4	60	36	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG24.00X1000-U05	24	1000	31.75	897.4	1003.4	70	36	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG24.00X1500-24	24	1500	32	1407.4	1503.4	60	36	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG24.00X1500-U05	24	1500	31.75	1397.4	1503.4	70	36	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG25.00X1000-24	25	1000	32	906.4	1003.4	60	37	24	TOHT11...	GP06-100, GP06-20-100-DC
URLG25.00X1000-U05	25	1000	31.75	896.4	1003.4	70	37	U05	TOHT11...	GP06-100, GP06-20-100-DC
URLG26.00X1000-25	26	1000	40	894.6	1003.7	70	39	25	TOHT12...	GP06, GP06-20-120-DC
URLG26.00X1000-U06	26	1000	38.1	894.6	1003.7	70	39	U06	TOHT12...	GP06, GP06-20-120-DC
URLG27.00X1000-25	27	1000	40	893.6	1003.7	70	40	25	TOHT12...	GP06, GP06-20-120-DC
URLG27.00X1000-U06	27	1000	38.1	893.6	1003.7	70	40	U06	TOHT12...	GP06, GP06-20-120-DC
URLG28.00X1000-25	28	1000	40	891.6	1003.7	70	42	25	TOHT12...	GP06, GP06-20-120-DC
URLG28.00X1000-U06	28	1000	38.1	891.6	1003.7	70	42	U06	TOHT12...	GP06, GP06-20-120-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
12 - 13.99	0 / - 0.08	+ 0.05 / - 0.11
14 - 28	0 / - 0.07	+ 0.05 / - 0.1


SPARE PARTS

Designation	Insert		Guide pad	
	Screw	Wrench	Screw	Wrench
URLG12... - URLG13...	SR10503833L040	T-7F	CSPB-2L043	IP-6F
URLG14... - URLG20...	SR14-560/S	T-8F	SR34-508	T-7F
URLG21...	SR34-506	T-9F	SR34-508	T-7F
URLG22... - URLG25...	SR14-571/S	T-10/5	SR34-508	T-7F
URLG26... - URLG28...	SR14-506	T-15F	SR34-508	T-7F

Recommended torque (N·m) for clamping: CSPB-2L043=0.7, SR34-508=0.9, SR34-506=0.9, SR14-560/S=1.2, SR10503833L040=1.3, SR14-571/S=3.2, SR14-506=4.8

CH-URLG

Indexable gundrill for drilling cross hole applications on gundrilling machines

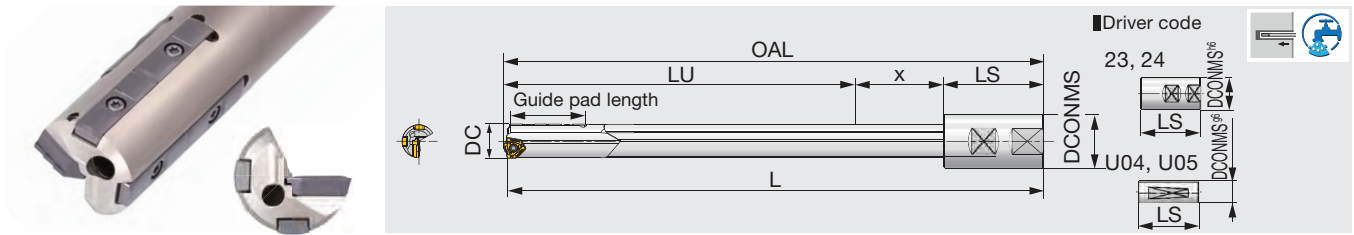

Designation	DC	L	DCONMS	LU	OAL	LS	X	Driver code	Insert	Guide pad	Guide pad length
CH-URLG14.68X1830-U05	14.68	1830	31.75	1740	1832	70	22	U05	TOHT07...	GP05-060, GP05-18-060-DC	36
CH-URLG15.00X1650-U04	15	1650	25.4	1559	1652	70	23	U04	TOHT07...	GP05-060, GP05-18-060-DC	36
CH-URLG15.00X1650-23	15	1650	25	1573	1652	56	23	23	TOHT07...	GP05-060, GP05-18-060-DC	36
CH-URLG15.06X1830-U05	15.06	1830	31.75	1739	1832	70	23	U05	TOHT07...	GP05-060, GP05-18-060-DC	36
CH-URLG18.00X1650-U04A	18	1650	25.4	1555.2	1652.2	70	27	U04	TOHT08...	GP05-075, GP05-18-075-DC	36
CH-URLG18.00X1650-23A	18	1650	25	1569.2	1652.2	56	27	23	TOHT08...	GP05-075, GP05-18-075-DC	36
CH-URLG18.24X1830-U05	18.24	1830	31.75	1736	1833	70	27	U05	TOHT09...	GP06-085, GP06-20-085-DC	40
CH-URLG18.64X1830-U05	18.64	1830	31.75	1736	1833	70	27	U05	TOHT09...	GP06-085, GP06-20-085-DC	40
CH-URLG23.00X1650-U05	23	1650	31.75	1549.4	1653.4	70	34	U05	TOHT11...	GP06-100, GP06-20-100-DC	40
CH-URLG23.00X1650-24	23	1650	32	1559.4	1653.4	60	34	24	TOHT11...	GP06-100, GP06-20-100-DC	40
CH-URLG23.42X1830-U05	23.42	1830	31.75	1729.4	1833.4	70	34	U05	TOHT11...	GP06-100, GP06-20-100-DC	40
CH-URLG23.80X1830-U05	23.8	1830	31.75	1727.4	1833.4	70	36	U05	TOHT11...	GP06-100, GP06-20-100-DC	40
CH-URLG24.00X1650-U05	24	1650	31.75	1547.4	1653.4	70	36	U05	TOHT11...	GP06-100, GP06-20-100-DC	40
CH-URLG24.00X1650-24	24	1650	32	1557.4	1653.4	60	36	24	TOHT11...	GP06-100, GP06-20-100-DC	40



DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
14.68 - 24	0 / - 0.09	+ 0.05 / - 0.12

SPARE PARTS

Designation	Insert		Guide pad	
	Screw	Wrench	Screw	Wrench
CH-URLG14... - CH-URLG18...	SR14-560/S	T-8F	SR34-508	T-7F
CH-URLG23... - CH-URLG24...	SR14-571/S	T-10/5	SR34-508	T-7F

Recommended torque (N·m) for clamping: SR34-508=0.9, SR14-560/S=1.2, SR14-571/S=3.2


■ Tool selection with regard to cross hole diameters and drill diameters

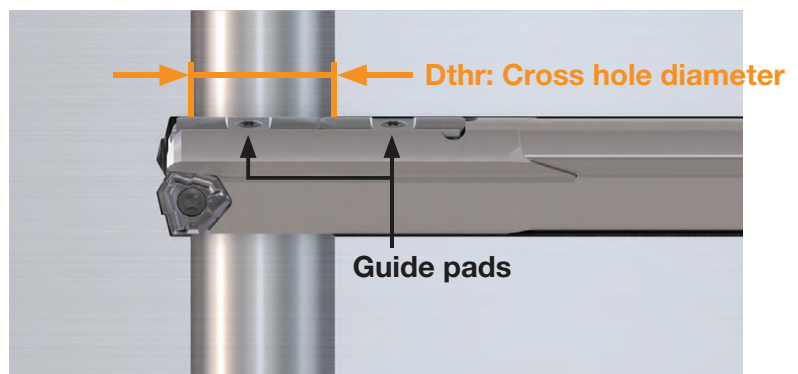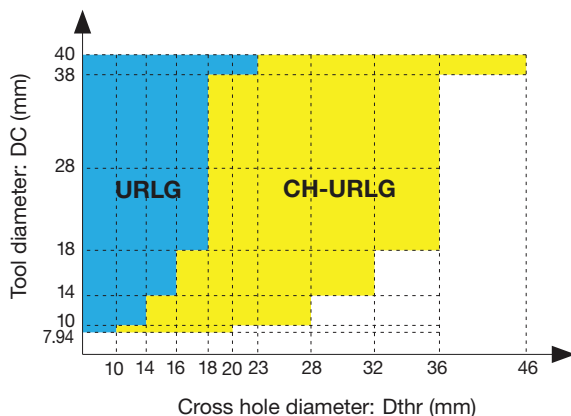

Note: A URLG drill can be used when the cross hole diameter (Dthr) is smaller than the drill's guide pad length.
When the cross hole diameter is larger than the drill's guide pad length, use an CH-URLG drill.

URLG-F

Indexable gundrill for gundrilling machines

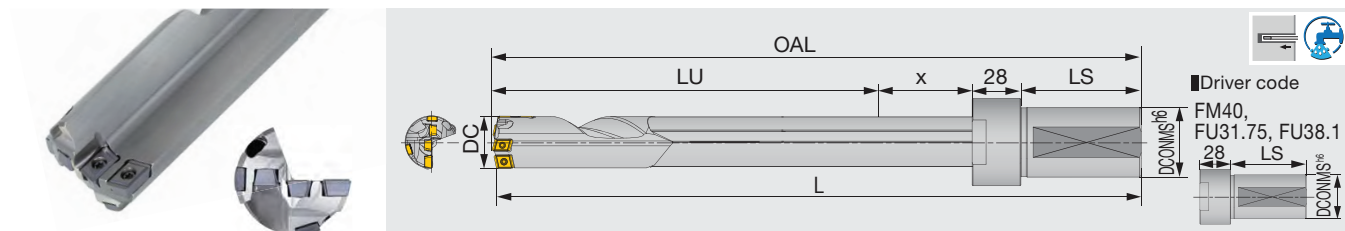

Designation	DC	L	DCONMS	LU	OAL	LS	x	Driver code	Insert	Guide pad
URLG29.36X1828-FU31.75	29.36	1828	31.75	1689.6	1830.6	69	44	FU31.75	NPMT07**-C, NPMT06**-I, NPHT06**-P	GP06, GP06-20-120-DC
URLG30.00X1000-FM40	30	1000	40	860.9	1002.9	69	45	FM40	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
URLG30.00X1650-FM40	30	1650	40	1510.9	1652.9	69	45	FM40	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC
URLG30.00X1650-FU38.1	30	1650	38.1	1510.9	1652.9	69	45	FU38.1	NPMT07**-C, NPMT07**-I, NPHT08**-P	GP06, GP06-20-120-DC

DC	Tool diameter tolerance	Applicable tolerance range of hole diameter
29.36, 30	0 / - 0.07	+ 0.05 / - 0.1

Caution:

The drill pipe is blackened to increase the resistance to corrosion, and the finished surface may appear uneven.

This, however, will not affect the performance of the drill.


SPARE PARTS

Designation	Insert						Guide pad	
	Central		Intermediate		Peripheral		Screw	Wrench
URLG29.36...	Screw	Wrench	Screw	Wrench	Screw	Wrench	SR34-508	T-7F
URLG30...	Screw	T-8F	Screw	T-8F	Screw	T-8F	SR34-508	T-7F

Recommended torque (N·m) for clamping: CSTB-2.2=1, SR34-508=0.9, CSTB-2.5=1.3

INSERT

ZSGT-NDJ (04...,05...)



P	Steel	★			
M	Stainless	★			
K	Cast iron	★			
N	Non-ferrous	★			
S	Superalloys	★			
H	Hard materials	★			

★ : First choice
☆ : Second choice


[illegible]

● : New product

- : Line up

Package quantity = 10 pcs.

LOGT-NDJ



P	Steel	★	☆		
M	Stainless	★	☆		
K	Cast iron	★	☆		
N	Non-ferrous	★	☆		
S	Superalloys	★	☆		
H	Hard materials	★	☆		


★ : First choice
☆ : Second choice

Designation	DCN	DCX	Coated							W1	S	RE	
			UT-923	UT-925									
LOGT060204R-NDJ	11.81	13.99	●	●							7.08	2	0.4

● : Line up

Package quantity = 10 pcs.

TOHT-NDL (07..., 08...)


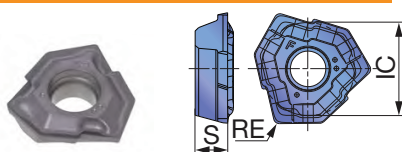


P	Steel	★			
M	Stainless	★			
K	Cast iron	★			
N	Non-ferrous	★			
S	Superalloys	★			
H	Hard materials	★			

★ : First choice
☆ : Second choice

Designation	DCN	DCX	UT-925	Coated							IC	S	RE
TOHT070304R-NDL	14	15.99	●								7.69	2.3	0.4
TOHT080305R-NDL	16	18	●								8.55	2.8	0.5
TOHT090305R-NDL	18.01	20	●								8.32	3	0.5
TOHT100305R-NDL	20.01	21.99	●								9.23	3.3	0.5
TOHT110405R-NDL	22	25	●								10.4	3.8	0.5
TOHT120405R-NDL	25.01	28	●								11.59	4.3	0.5

● : Line up
Package quantity = 10 pcs.

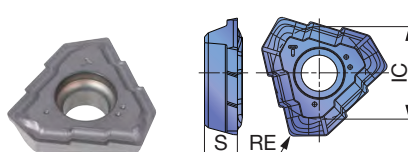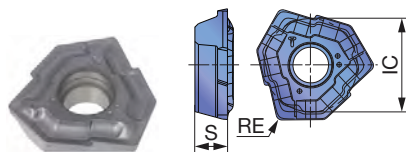TOHT-NDJ (070..., 080...)
TOHT-NDJ (090... - 120...)


P	Steel	★	☆
M	Stainless	★	☆
K	Cast iron	★	☆
N	Non-ferrous	★	☆
S	Superalloys	★	☆
H	Hard materials	★	☆



★ : First choice
☆ : Second choice

Designation	DCN	DCX	Coated		IC	S	RE
			UT-923	UT-925			
TOHT070304R-NDJ	14	15.99	•	•	7.69	2.3	0.4
TOHT080305R-NDJ	16	18	•	•	8.55	2.8	0.5
TOHT090305R-NDJ	18.01	20	•	•	8.32	3	0.5
TOHT100305R-NDJ	20.01	21.99	•	•	9.23	3.3	0.5
TOHT110405R-NDJ	22	25	•	•	10.4	3.8	0.5
TOHT120405R-NDJ	25.01	28	•	•	11.59	4.3	0.5

• : Line up
Package quantity = 10 pcs.

■ Identifications for NDL and NDJ geometries

Chipbreaker	NDL	NDJ
Cutting edge strength	Strong	Very strong
ID on insert		

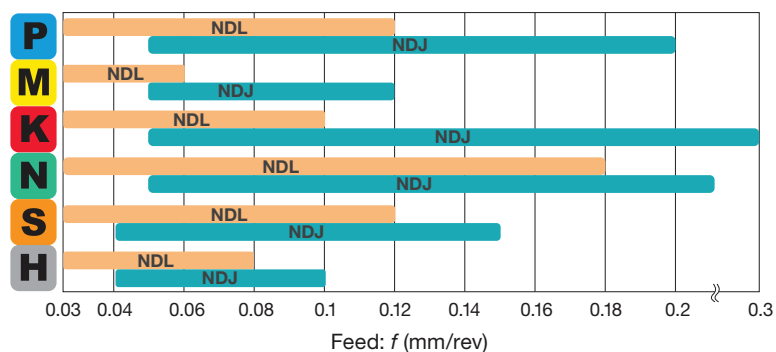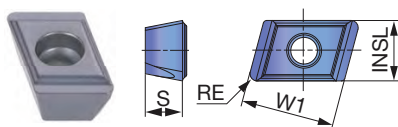■ Recommended feed rates

FBM-C(For central)


P	Steel	★	☆	☆
M	Stainless	★	☆	☆
K	Cast iron	★	☆	☆
N	Non-ferrous	★	☆	☆
S	Superalloys	☆	☆	★
H	Hard materials	☆	☆	★


★ : First choice
☆ : Second choice

Designation	INSL	W1	Coated			S	DCN	DCX	RE
			UT-923	UT-925	UT-927				
NPMT070408L-G-C	6.5	10	•	•	•	4	28.01	35	0.8
NPMT080408L-G-C	8	10	•	•	•	4	35.01	40	0.8

• : Line up
Package quantity = 10 pcs.

INSERT

NPMT-I (For intermediate)




P	Steel	★	☆	☆
M	Stainless	★	☆	☆
K	Cast iron	★	☆	☆
N	Non-ferrous	★	☆	☆
S	Superalloys	☆	☆	★
H	Hard materials	☆	☆	★

★ : First choice
☆ : Second choice

Designation	INSL	W1	Coated					S	DCN	DCX	RE
			UT-923	UT-925	UT-927						
NPHT060304R-G-I	5.5	8	●	●	●			3	28.01	29.99	0.4
NPHT060304R-DL-I	5.5	8		●				3	28.01	29.99	0.4
NPHT070404R-G-I	6.5	10	●	●	●			4	30	40	0.4
NPHT070404R-DL-I	6.5	10		●				4	30	40	0.4

● : Line up
Package quantity = 10 pcs.

NPHT-P (For peripheral)




P	Steel	★	☆	☆
M	Stainless	★	☆	☆
K	Cast iron	★	☆	☆
N	Non-ferrous	★	☆	☆
S	Superalloys	☆	☆	★
H	Hard materials	☆	☆	★

★ : First choice
☆ : Second choice

Designation	INSL	W1	Coated					S	DCN	DCX	RE
			UT-923	UT-925	UT-927						
NPHT060304R-G-P	6	8		●				3	28.01	29.99	0.4
NPHT060308R-G-P	6	8	●	●	●			3	28.01	29.99	0.8
NPHT080404R-G-P	7.5	10		●				4	30	38	0.4
NPHT080408R-G-P	7.5	10	●	●	●			4	30	38	0.8
NPHT090404R-G-P	9	10		●				4	38.01	40	0.4
NPHT090408R-G-P	9	10	●	●	●			4	38.01	40	0.8

● : Line up
Package quantity = 10 pcs.


Recommended feed rates

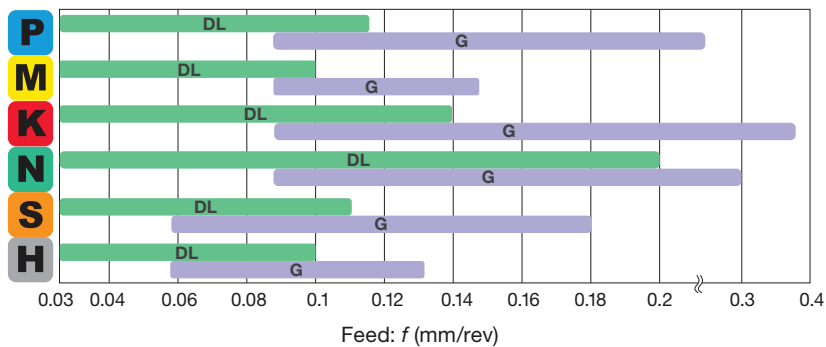

Note: For cross hole drilling, please use the DL type chipbreaker because the feed needs to be reduced.

Insert grade

UT-923




Resistance to built-up edge
Coating layer to resist built-up edge

Resistance to wear, oxidation, and fracture
2 coating layers for wear and oxidation resistance. Layered alternatively to prevent crack from propagating to fracture.

Strong coating-substrate adhesion
Coating is provided with strong adhesion between the coating layer and carbide substrate to prevent coating delamination

Substrate
Carbide substrate features wear and fracture resistance


UT-925



Drastically improves adhesion strength between the coating and the substrate.

Substrate provides plastic deformation resistance and toughness.


UT-927



Nano-multi-layered AlTiN coating with high Al content
Prevents micro cracks from developing. Long tool life & stable machining

Improved adhesion strength
Prevents notch wear that tends to occur in machining heat-resistant alloys


Specially designed substrate

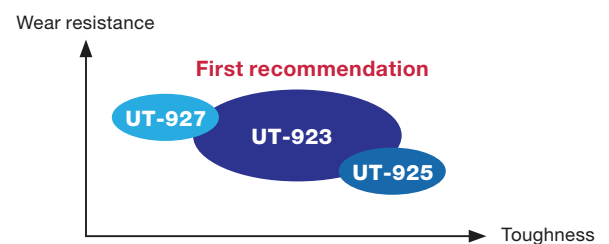


CARBIDE GUIDE PADS

New

SGP03



GP04, 05, 06, 07, 08

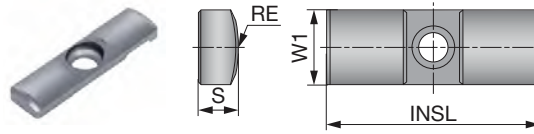

P	Steel	☆	★	☆
M	Stainless	☆	☆	★
K	Cast iron	☆	★	☆
N	Non-ferrous	☆	★	☆
S	Superalloys	☆	★	☆
H	Hard materials	☆	★	☆

★ : First choice
☆ : Second choice

Designation	DCN	DCX	Coated		W1	INSL	S	RE
			UT-925	UT-923				
New SGP03-12-035-DC	7.94	8.49	●		3.9	12	1.6	35
New SGP03-12-040-DC	8.5	9.99	●		3.9	12	1.6	40
GP04-16-045-DC	10	10.99	●		4	16	1.8	4.5
GP04-16-050-DC	11	11.99	●		4	16	1.8	5
GP04-055	12	13.99			4	16	2	5.5
GP04-16-055-DC	12	13.99	●	●	4	16	2	5.5
GP05-060	14	15.99			5	18	2.5	6
GP05-18-060-DC	14	15.99	●	●	5	18	2.5	6
GP05-075	16	18			5	18	2.5	7.5
GP05-18-075-DC	16	18	●	●	5	18	2.5	7.5
GP06-085	18.01	21			6	20	3	8.5
GP06-20-085-DC	18.01	21	●	●	6	20	3	8.5
GP06-100	21.01	25			6	20	3	10
GP06-20-100-DC	21.01	25	●	●	6	20	3	10
GP06	25.01	33			6	20	3	12
GP06-20-120-DC	25.01	33	●	●	6	20	3	12
GP07	33.01	38			7	20	3.5	12
GP07-20-120-DC	33.01	38	●	●	7	20	3.5	12
GP08	38.01	40			8	25	4.5	15.5
GP08-25-155-DC	38.01	40	●	●	8	25	4.5	15.5


● : New product

● : Line up

Package quantity = 5 pcs.


Double chamfer

GP...-DC



Single chamfer




GP...



■ Guide pad grade and the timing for replacement

Guide pads are subject to wear, like inserts

- The guide pad has two sides.
- Each guide pad can be used on two sides. When the first corner wears out to 70% of the width, reverse the guide pad to use the second side.
- Replace with a new guide pad when the second side wears out.

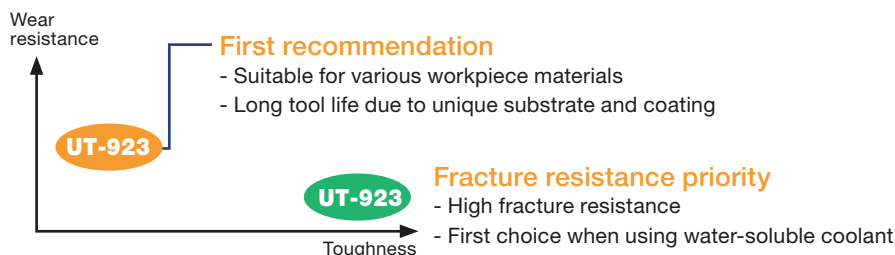

STANDARD CUTTING CONDITIONS

Drill diameter: DC = ø7.94 - ø9.99 mm

ISO	Workpiece material	Chip-breaker	Grade	Cutting speed Vc (m/min)	Feed: f (mm/rev)
P	Low carbon steel (C < 0.3) SS400, SM490, S25C, etc. E275A, C25, etc.	NDJ	UT-923	60 - 100	0.05 - 0.08
	Carbon steel (C > 0.3) S45C, S55C, etc. C45, C55, etc.	NDJ	UT-923	60 - 100	0.05 - 0.14
	Low alloy steel (C < 0.3) SCM415, 18CrMo4, etc.	NDJ	UT-923	60 - 100	0.05 - 0.08
	Alloy steel (C > 0.3) SCM440, SCr420, 42CrMo4, 20Cr4, etc.	NDJ	UT-923	60 - 100	0.05 - 0.14
M*	Stainless steel (Austenitic) SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-3, etc.	NDJ	UT-923	60 - 80	0.05 - 0.08
	Stainless steel (Martensitic, Ferritic) SUS430, SUS416, etc. X6Cr17, X12CrS13, etc.	NDJ	UT-923	60 - 80	0.05 - 0.08
	Stainless steel (Precipitation hardening) SUS630, X5CrNiCuNb16-4, etc.	NDJ	UT-923	60 - 80	0.05 - 0.08
K	Grey cast iron FC250, GG25, 250, etc.	NDJ	UT-923	60 - 100	0.05 - 0.2
	Ductile cast iron FCD700, 700-2, etc.	NDJ	UT-923	60 - 100	0.05 - 0.2
N	Aluminium alloys	NDJ	UT-923	60 - 100	0.05 - 0.18
S	Heat-resistant alloys Inconel 718, etc.	NDJ	UT-923	20 - 50	0.04 - 0.06
	Titanium alloys Ti-6Al-4V, etc.	NDJ	UT-923	30 - 60	0.04 - 0.1
H	Hardened steel ≥ 40HRC	NDJ	UT-923	20 - 50	0.04 - 0.06

*Coolant recommendations for drilling stainless steel:

- Oil coolant is first priority

- Water soluble coolant requires at least 20% oil concentration

Drill diameter: DC = ø10 - ø28 mm

ISO	Workpiece material	Priority	Chip-breaker	Grade	Cutting speed Vc (m/min)	Feed: f (mm/rev)			
						ø10 - ø11.8	ø11.81 - ø13.99	ø14 - ø18	ø18.01 - ø28
P	Low carbon steel (C < 0.3) SS400, SM490, S25C, etc. E275A, C25, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.1	0.03 - 0.1
		First choice	NDJ	UT-923	80 - 140	0.05 - 0.08	0.05 - 0.1	0.06 - 0.12	0.08 - 0.16
	Carbon steel (C > 0.3) S45C, S55C, etc. C45, C55, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.1	0.03 - 0.12
		First choice	NDJ	UT-923	80 - 140	0.05 - 0.14	0.05 - 0.16	0.07 - 0.18	0.08 - 0.2
	Low alloy steel (C < 0.3) SCM415, 18CrMo4, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.12	0.08 - 0.1
		First choice	NDJ	UT-923	80 - 140	0.05 - 0.08	0.05 - 0.1	0.06 - 0.12	0.08 - 0.16
	Alloy steel (C > 0.3) SCM440, SCr420, 42CrMo4, 20Cr4, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.1	0.03 - 0.12
		First choice	NDJ	UT-923	80 - 120	0.05 - 0.14	0.05 - 0.16	0.07 - 0.18	0.08 - 0.2
M*	Stainless steel (Austenitic) SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-3, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.06	0.03 - 0.06
		First choice	NDJ	UT-923	60 - 100	0.05 - 0.08	0.05 - 0.1	0.05 - 0.1	0.05 - 0.12
	Stainless steel (Martensitic, Ferritic) SUS430, SUS416, etc. X6Cr17, X12CrS13, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.06	0.03 - 0.06
		First choice	NDJ	UT-923	60 - 100	0.05 - 0.08; 0.05 - 0.1	0.05 - 0.1	0.05 - 0.1	0.05 - 0.12
	Stainless steel (Precipitation hardening) SUS630, X5CrNiCuNb16-4, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.06	0.03 - 0.06
		First choice	NDJ	UT-923	60 - 100	0.05 - 0.08	0.05 - 0.1	0.05 - 0.1	0.05 - 0.12
K	Grey cast iron FC250, GG25, 250, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.15	0.05 - 0.18
		First choice	NDJ	UT-923	80 - 140	0.05 - 0.2	0.05 - 0.25	0.05 - 0.25	0.05 - 0.3
	Ductile cast iron FCD700, 700-2, etc.	Lower feed	NDL	UT-925	50 - 100	-	-	0.03 - 0.15	0.05 - 0.18
		First choice	NDJ	UT-923	80 - 140	0.05 - 0.2	0.05 - 0.25	0.05 - 0.25	0.05 - 0.3
N	Aluminium alloys	Lower feed	NDL	UT-925	80 - 160	-	-	0.03 - 0.15	0.03 - 0.15
		First choice	NDJ	UT-923	100 - 200	0.05 - 0.18	0.05 - 0.2	0.08 - 0.22	0.1 - 0.25
S	Heat-resistant alloys Inconel 718, etc.	Lower feed	NDL	UT-925	20 - 50	-	-	0.03 - 0.06	0.03 - 0.08
		First choice	NDJ	UT-923	20 - 50	0.04 - 0.06	0.04 - 0.08	0.04 - 0.08	0.04 - 0.1
	Titanium alloys Ti-6Al-4V, etc.	Lower feed	NDL	UT-925	30 - 60	-	-	0.03 - 0.1	0.03 - 0.12
		First choice	NDJ	UT-923	30 - 60	0.04 - 0.1	0.05 - 0.13	0.05 - 0.13	0.05 - 0.15
H	Hardened steel ≥ 40HRC	Lower feed	NDL	UT-925	40 - 100	-	-	0.03 - 0.08	0.03 - 0.08
		First choice	NDJ	UT-923	50 - 100	0.04 - 0.06	0.04 - 0.08	0.04 - 0.08	0.04 - 0.1

The use of NDL chipbreakers is recommended for cross hole drilling with low feed conditions.

*Coolant recommendations for drilling stainless steel:

- Oil coolant is first priority

- Water soluble coolant requires at least 20% oil concentration

Drill diameter: DC = $\varnothing 28.01$ - $\varnothing 40$ mm

ISO	Workpiece material	Priority	For central		For intermediate		For peripheral		Cutting speed Vc (m/min)	Feed f (mm/rev) $\varnothing 28.01$ - $\varnothing 40$
			Chip-breaker	Grade	Chip-breaker	Grade	Chip-breaker	Grade		
P	Low carbon steel (C < 0.3) SS400, SM490, S25C, etc. E275A, C25, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.1
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 140	0.1 - 0.25
	Carbon steel (C > 0.3) S45C, S55C, etc. C45, C55, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.12
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 140	0.1 - 0.3
	Low alloy steel (C < 0.3) SCM415, 18CrMo4, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.1
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 140	0.1 - 0.25
	Alloy steel (C > 0.3) SCM440, SCr420, 42CrMo4, 20Cr4, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.12
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 120	0.1 - 0.3
M*	Stainless steel (Austenitic) SUS304, SUS316, etc. X5CrNi18-9, X5CrNiMo17-12-3, etc.	Lower feed	G	UT-927	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.1
		First choice	G	UT-927	G	UT-927	G	UT-927	60 - 100	0.1 - 0.15
	Stainless steel (Martensitic, Ferritic) SUS430, SUS416, etc. X6Cr17, X12CrS13, etc.	Lower feed	G	UT-927	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.1
		First choice	G	UT-927	G	UT-927	G	UT-927	60 - 100	0.1 - 0.15
	Stainless steel (Precipitation hardening) SUS630, X5CrNiCuNb16-4, etc.	Lower feed	G	UT-927	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.1
		First choice	G	UT-927	G	UT-927	G	UT-927	60 - 100	0.1 - 0.15
K	Grey cast iron FC250, GG25, 250, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.14
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 140	0.1 - 0.35
	Ductile cast iron FCD700, 700-2, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	50 - 100	0.03 - 0.14
		First choice	G	UT-925	G	UT-925	G	UT-925	80 - 140	0.1 - 0.35
N	Aluminium alloys	Lower feed	G	UT-925	DL	UT-925	G	UT-925	80 - 160	0.03 - 0.2
		First choice	G	UT-925	G	UT-925	G	UT-925	100 - 200	0.1 - 0.3
S	Heat-resistant alloys Inconel 718, etc.	Lower feed	G	UT-927	DL	UT-925	G	UT-925	20 - 50	0.03 - 0.08
		First choice	G	UT-927	G	UT-927	G	UT-927	20 - 50	0.06 - 0.13
	Titanium alloys Ti-6Al-4V, etc.	Lower feed	G	UT-925	DL	UT-925	G	UT-925	30 - 60	0.03 - 0.1
		First choice	G	UT-925	G	UT-925	G	UT-925	30 - 60	0.1 - 0.18
H	Hardened steel $\geq 40\text{HRC}$	Lower feed	G	UT-927	DL	UT-925	G	UT-925	40 - 100	0.03 - 0.1
		First choice	G	UT-927	G	UT-927	G	UT-927	50 - 100	0.06 - 0.13

The use of DL chipbreakers is recommended for cross hole drilling with low feed conditions.

*Coolant recommendations for drilling stainless steel:

- Oil coolant is first priority
- Water soluble coolant requires at least 20% oil concentration

DESIGNATION FOR TAILOR-MADE TOOLS

Special tool code may be created per below according to your specific drilling needs.

MCUR


18.50

XM

25

22

1 Series	2 Drill dia. DC (mm)	3 Driver dia. DCONMS (mm)	4 LU/DC ratio
MCUR DeepTri-Drill (For machining centers and lathes) CH-MCUR DeepTri-Drill (For cross hole drilling on machining centers and lathes)	18.50 18.50	25 25	

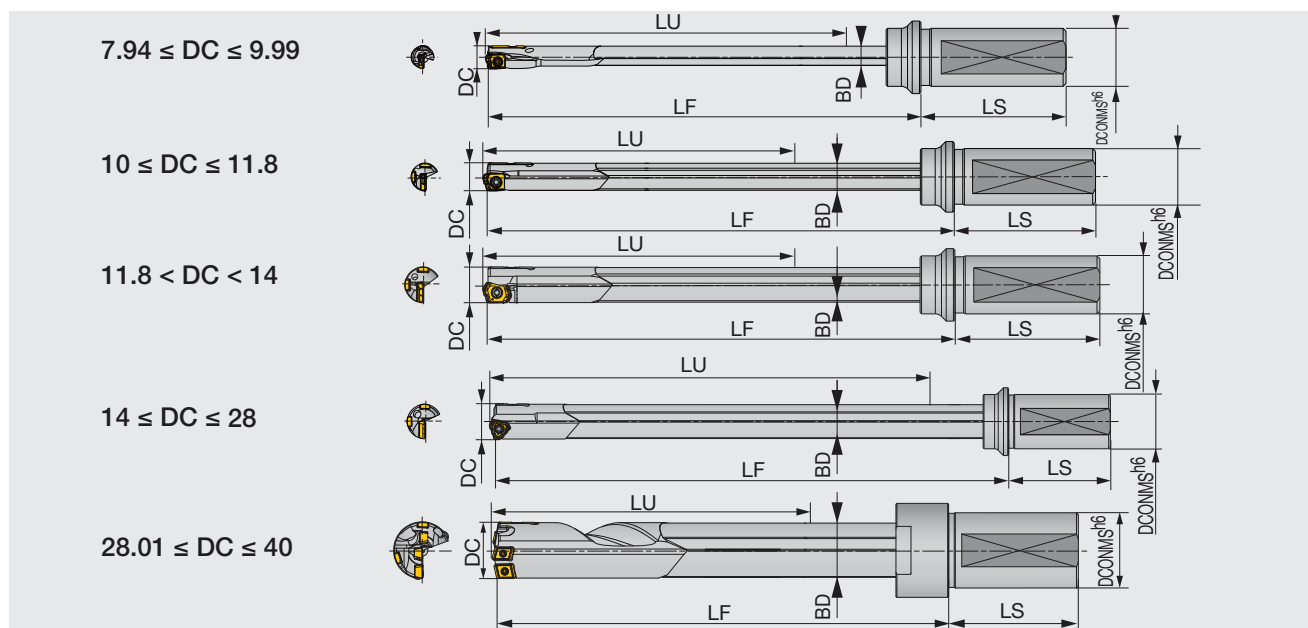

AVAILABLE RANGE OF TAILOR-MADE DRILL BODIES

DC	DCONMS	LU	LS	LF	BD	DC	DCONMS	LU	LS	LF	BD
7.94 - 8.39	20	144 - 421	50	179-444	7.7	18.7 - 19.69	25	140 - 1003	56	170 - 1043	18.2
8.40 - 8.69	20	143 - 436	50	180-459	8	19.7 - 20.69	32	138 - 1053	60	170 - 1095	19
8.70 - 8.99	20	143 - 451	50	180-474	8	20.7 - 21.69	32	137 - 1103	60	171 - 1145	20
9.00 - 9.39	20	142 - 471	50	181-494	8.6	21.7 - 22.69	32	135 - 1153	60	171 - 1197	21
9.40 - 9.69	20	142 - 486	50	181-509	9	22.7 - 23.69	32	134 - 1203	60	171 - 1248	22
9.70 - 9.99	20	141 - 501	50	182-524	9	23.7 - 24.69	32	132 - 1253	60	171 - 1300	23
10 - 10.39	20	145 - 526	50	164 - 551	9.6	24.7 - 25.69	32	132 - 1303	60	171 - 1351	24
10.4 - 10.69	20	144 - 551	50	164 - 577	9.9	25.7 - 26.69	40	130 - 1353	70	171 - 1403	25
10.7 - 10.99	20	144 - 551	50	164 - 577	10.2	26.7 - 27.69	40	129 - 1403	70	171 - 1454	26
11 - 11.49	20	143 - 601	50	164 - 628	10.5	27.7 - 28	40	127 - 1403	70	171 - 1456	27
11.5 - 11.8	20	143 - 601	50	164 - 628	11	28.01 - 29	40	128, 177* - 1452	69	222 - 1519	27
11.81 - 12.49	20	142 - 651	50	164 - 679	11.5	29.01 - 29.99	40	126, 175* - 1502	69	222 - 1571	28
12.5 - 12.99	20	141 - 651	50	164 - 680	12	30 - 31	40	125, 174* - 1552	69	222 - 1622	29
13 - 13.49	25	140 - 701	56	164 - 734	12.5	31.01 - 32	40	123, 172* - 1602	69	222 - 1674	30
13.5 - 13.99	25	140 - 701	56	164 - 734	13	32.01 - 33	40	171 - 1653	69	222 - 1726	31
14 - 14.49	25	146 - 752	56	170 - 786	13.5	33.01 - 34	40	169 - 1702	69	222 - 1777	32
14.5 - 14.99	25	145 - 752	56	170 - 787	14	34.01 - 35	40	169 - 1753	69	222 - 1828	32
15 - 15.49	25	144 - 802	56	170 - 838	14.5	35.01 - 36	40	166 - 1803	69	222 - 1881	34
15.5 - 15.99	25	144 - 802	56	170 - 839	15	36.01 - 37	40	166 - 1852	69	222 - 1930	34
16 - 16.79	25	143 - 852	56	171 - 888	15.5	37.01 - 38	40	163 - 1903	69	222 - 1984	36
16.8 - 17.69	25	142 - 902	56	171 - 939	16.2	38.01 - 39	40	168 - 1953	69	227 - 2033	36
17.7 - 18.69	25	141 - 952	56	171 - 991	17.2	39.01 - 40	40	165 - 2003	69	227 - 2086	38

Please provide the driver shape necessary for your request

*3 inserts type


URLG**18.50****X****900****- 23**

1 Series	
URLG	DeepTri-Drill (For gundrill machines)
CH-URLG	DeepTri-Drill (For cross hole drilling on gundrilling machines)

2 Drill dia. DC (mm)	
18.50	18.50

3 Overall length: L (mm)	
900	900

4 Driver code	
23	23



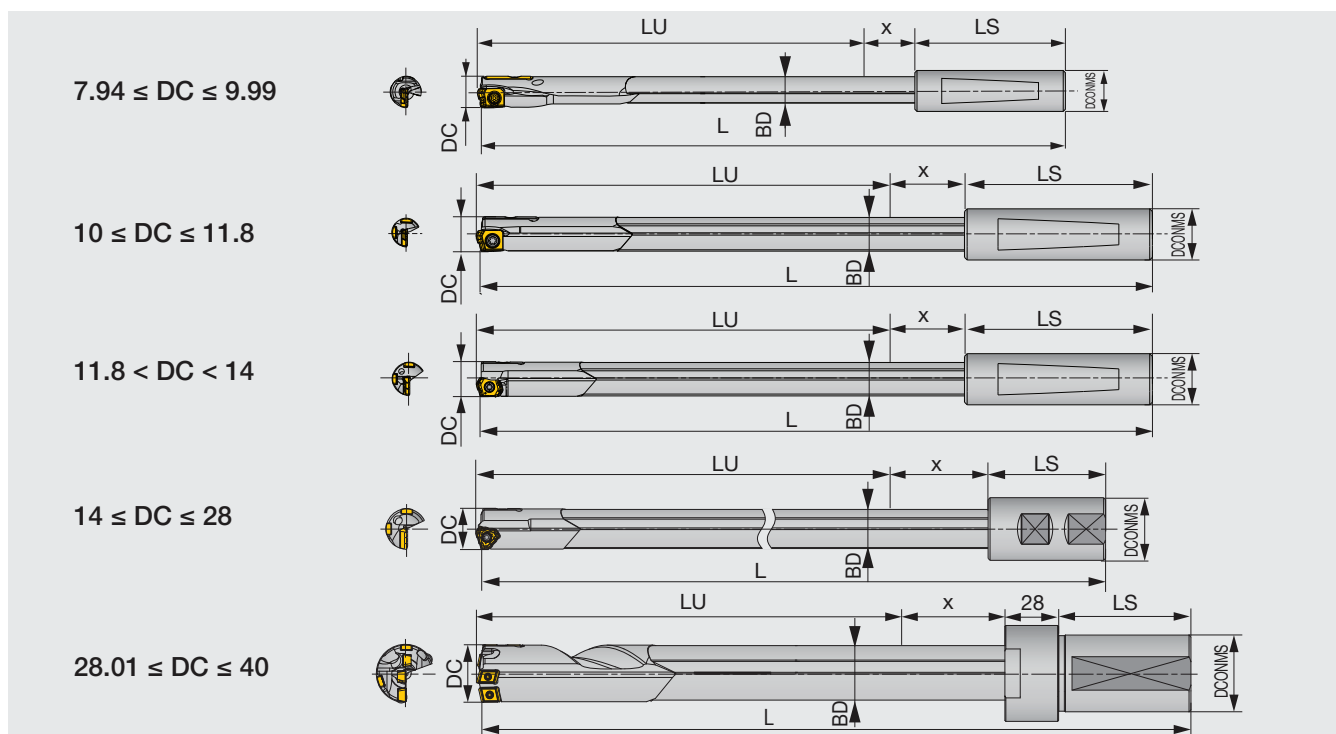


AVAILABLE RANGE OF TAILOR-MADE DRILL BODIES

DC	L	x	BD	DC	L	x	BD
7.94 - 8.39	400 - 2200	12	7.7	19.7 - 20.69	400 - 2400	30	19
8.40 - 8.99	400 - 2200	13	8	20.7 - 21.69	400 - 2400	31	20
9.00 - 9.39	400 - 2200	14	8.6	21.7 - 22.69	400 - 2400	33	21
9.40 - 9.69	400 - 2200	14	9	22.7 - 23.69	400 - 2400	34	22
9.70 - 9.99	400 - 2200	15	9	23.7 - 24.69	400 - 2400	36	23
10 - 10.39	400 - 2200	15	9.6	24.7 - 25.69	400 - 2400	37	24
10.4 - 10.69	400 - 2200	16	9.9	25.7 - 26.69	400 - 2400	39	25
10.7 - 10.99	400 - 2200	16	10.2	26.7 - 27.69	400 - 2400	40	26
11 - 11.49	400 - 2200	17	10.5	27.7 - 28	400 - 2400	42	27
11.5 - 11.99	400 - 2200	17	11	28.01 - 29	400 - 2400	42	27
12 - 12.49	400 - 2400	18	11.5	29.01 - 29.99	400 - 2400	44	28
12.5 - 12.99	400 - 2400	19	12	30 - 31	400 - 2400	45	29
13 - 13.49	400 - 2400	20	12.5	31.01 - 32	400 - 2400	47	30
13.5 - 13.99	400 - 2400	20	13	32.01 - 33	400 - 2400	48	31
14 - 14.49	400 - 2400	21	13.5	33.01 - 34	400 - 2400	50	32
14.5 - 14.99	400 - 2400	22	14	34.01 - 35	400 - 2400	50	32
15 - 15.49	400 - 2400	23	14.5	35.01 - 36	400 - 2400	53	34
15.5 - 15.99	400 - 2400	23	15	36.01 - 37	400 - 2400	53	34
16 - 16.79	400 - 2400	24	15.5	37.01 - 38	400 - 2400	56	36
16.8 - 17.69	400 - 2400	25	16.2	38.01 - 39	400 - 2400	56	36
17.7 - 18.69	400 - 2400	27	17.2	39.01 - 40	400 - 2400	59	38
18.7 - 19.69	400 - 2400	28	18.2				

Please provide the driver shape necessary for your request

APPLICATION RANGE

Feed f (mm/rev)	0.03 - 0.05	0.03 - 0.05	0.1 - 0.3
Application	OK Cross hole drilling	OK Inclined exit	OK Boring
			

Note 1) When drilling cross holes or exiting inclined surfaces, ensure that the length of the guide pads are sufficient enough to sustain the drill stability during these applications.


Note 2) A pilot hole is needed prior to boring operations. $ap \geq 1$ mm is recommended for boring operations.

BLIND HOLE SHAPES OF THE HOLE BOTTOM


DC	Insert	Maximum difference PL
New 7.94 - 8.99	ZSGT04...	1.2
New 9.00 - 9.99	ZSGT05...	1.1
10 - 11.8	ZSGT06...	1.7
11.81 - 13.99	LOGT06...	1.8
14 - 15.99	TOHT07...	2
16 - 18	TOHT08...	2.2
18.01 - 20	TOHT09...	3
20.01 - 21.99	TOHT10...	3.2
22 - 25	TOHT11...	3.4
25.01 - 28	TOHT12...	3.6

New


ZSGT04..., 05...




ZSGT06...




LOGT06...



TOHT07..., 08...




TOHT09... - TOHT12...



DC	Central	Insert Intermediate	Peripheral	Maximum difference PL
28.01 - 28.84	NPMT07**-C	NPMT06**-I	NPHT06**-P	2.5
28.85 - 29	NPMT07**-C	NPMT06**-I	NPHT06**-P	2.6
29.01 - 29.83	NPMT07**-C	NPMT06**-I	NPHT06**-P	2.5
29.84 - 29.99	NPMT07**-C	NPMT06**-I	NPHT06**-P	2.8
30 - 30.63	NPMT07**-C	NPMT07**-I	NPHT08**-P	2.8
30.64 - 31.53	NPMT07**-C	NPMT07**-I	NPHT08**-P	2.9
31.54 - 32.4	NPMT07**-C	NPMT07**-I	NPHT08**-P	3
32.41 - 33	NPMT07**-C	NPMT07**-I	NPHT08**-P	3.1
33.01 - 33.53	NPMT07**-C	NPMT07**-I	NPHT08**-P	2.9
33.54 - 34.43	NPMT07**-C	NPMT07**-I	NPHT08**-P	3
34.44 - 35	NPMT07**-C	NPMT07**-I	NPHT08**-P	3.1
35.01 - 35.42	NPMT08**-C	NPMT07**-I	NPHT08**-P	3
35.43 - 36	NPMT08**-C	NPMT07**-I	NPHT08**-P	3.1
36.01 - 36.52	NPMT08**-C	NPMT07**-I	NPHT08**-P	2.9
36.53 - 37.42	NPMT08**-C	NPMT07**-I	NPHT08**-P	3
37.43 - 38	NPMT08**-C	NPMT07**-I	NPHT08**-P	3.1
38.01 - 38.12	NPMT08**-C	NPMT07**-I	NPHT09**-P	3.3
38.13 - 39	NPMT08**-C	NPMT07**-I	NPHT09**-P	3.4
39.01 - 39.22	NPMT08**-C	NPMT07**-I	NPHT09**-P	3.2
39.23 - 40	NPMT08**-C	NPMT07**-I	NPHT09**-P	3.3


NPMT...



REQUIRED SPINDLE POWER AND COOLANT PRESSURE


Net power

P S55C / C55

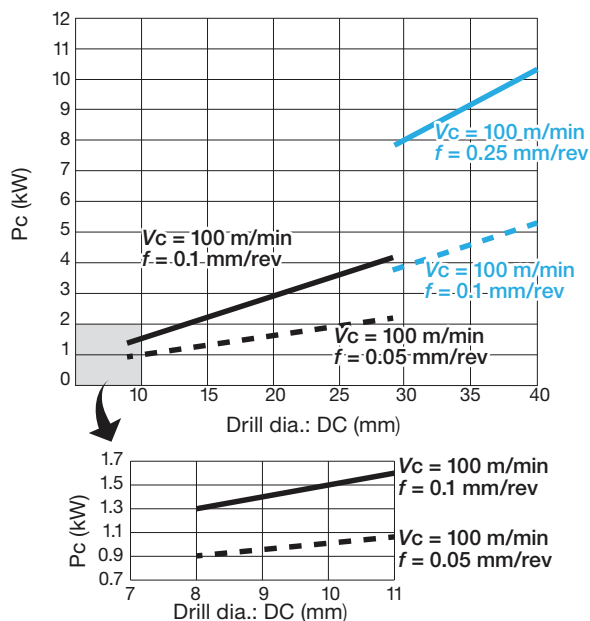


Torque


P S55C / C55

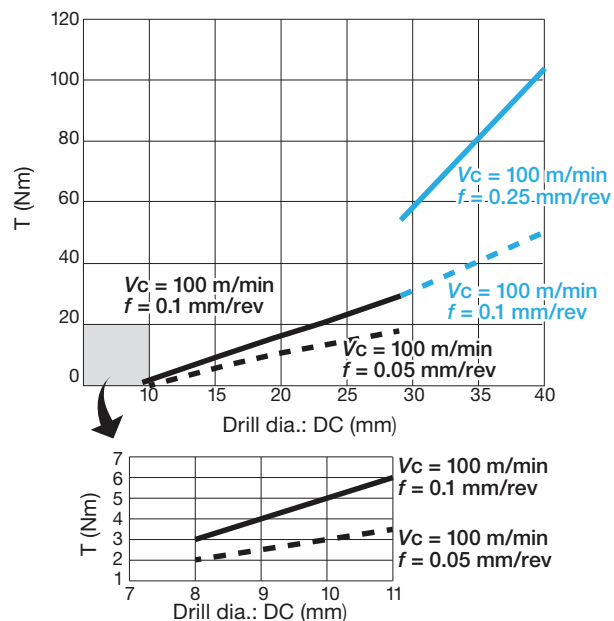

Coolant pressure

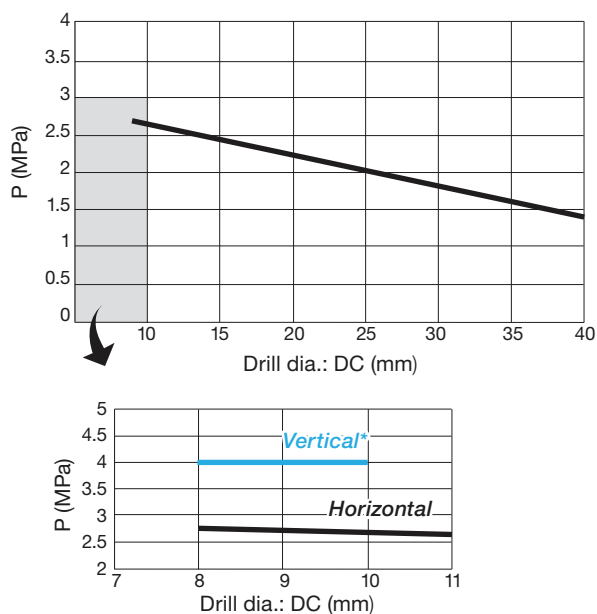


Coolant flow rate

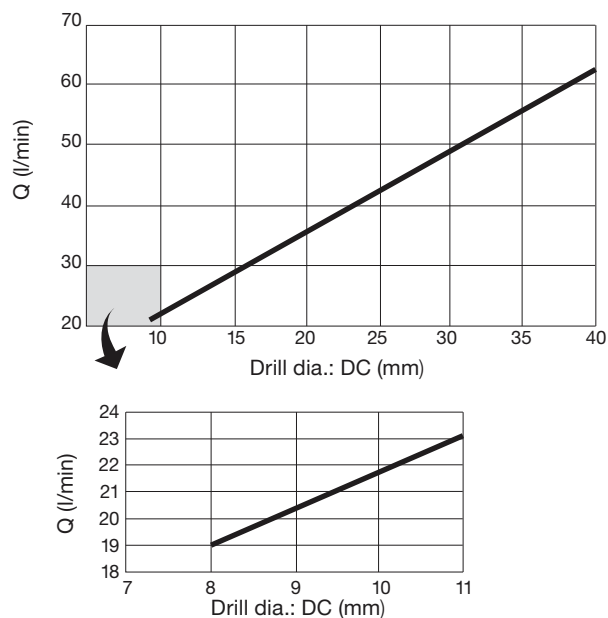

*Vertical machining requires a coolant pressure of 4MPa or higher to evacuate chips.

DRILLING PROCEDURE ON MACHINING CENTERS AND LATHES

Proceed as instructed below in order to maximize the tool performance.

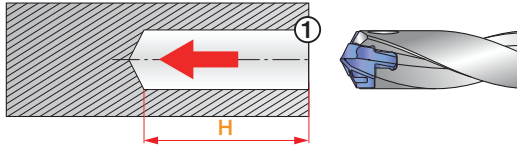

① Drill a pilot hole

Hole diameter tolerance: $+0.01 - +0.05$ mm


Hole depth: $H = 25$ mm

Note: Drill $H = 45$ mm when using an CH-MCUR drill (for cross-hole).

Please use DrillMeister or DrillForce-Meister for a pilot hole.

Use a drill with 3xD or smaller.

Note: Recommend to use a drill with 5xD when using an CH-MCUR drill.

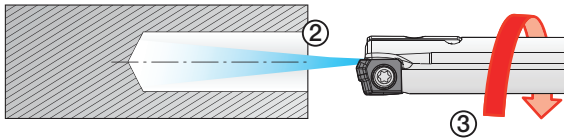


② Start coolant

③ Slowly insert DeepTri-Drill into the pilot hole

No. of revolution: $n = 50 - 100 \text{ min}^{-1}$

Feed rate: $V_f = 100 - 300 \text{ mm/min}$


Note: Do not rotate the drill at full machining speed before engaging the pilot hole.

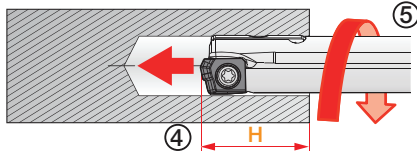

④ Stop the drill at $H = 20$ mm depth

Note: Stop at $H = 40$ mm when using an CH-MCUR drill.

⑤ Start rotating at full machining speed

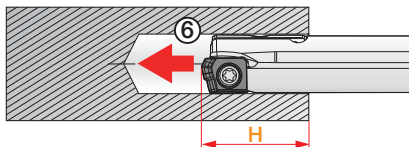


⑥ Start feeding

At the entry ($H = 20 - 30$ mm) $\rightarrow$ Feed: $f = 80\%$ of programmed feed

Note: Drill $H = 40 - 50$ mm when using an CH-MCUR drill.

Hole depth: $H \geq 30$ mm $\rightarrow$ Feed: $f = 100\%$

Note: Drill $H = 50$ mm or more when using an CH-MCUR drill.

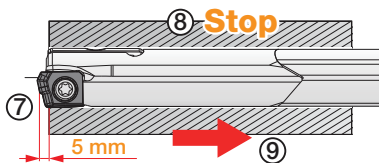

⑦ For a through hole

Continue drilling until the drill head passes through the workpiece by 5 mm.

Note: When machining gummy materials such as low carbon steel, reduce the feed rate to 70% of the normal level right before exiting the material to prevent chips from scattering.

⑧ Stop the rotation and coolant


⑨ Return the drill, and operation finished

HOW TO USE A TRLG OR MCUR (> 25xD) DRILL ON A MACHINING CENTER OR HORIZONTAL BORING MACHINE


When using a long-overhang URLG or MCUR drill of over 25xD on a conventional machining center or horizontal boring machine with no drill guide or anti-whip bushings that support the tool along its entire length, apply the following instructions to prevent the drill from "whipping" during machining.




- ① Drill a pilot hole



- ② Use an MCUR drill of $\leq 25xD$ to make the pilot hole as deep as possible.

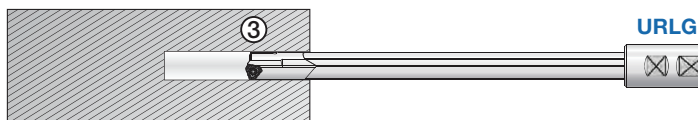

- ③ Start with a low drill revolution and low penetration rate as the URLG or MCUR (> 25xD) drill enters the pilot hole.
No. of revolution: $n = 50 - 100 \text{ min}^{-1}$
Feed speed: $V_f = 100 - 300 \text{ mm/min}$

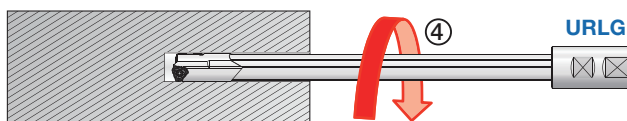

- ④ When URLG drill reaches all the way to the end of the pilot hole, increase drill rotation at full machining speed.



- ⑤ Start feeding to complete the drilling

Note:


Do NOT skip Step ②. The tool will whip during machining, which may lead to drill breakage and possible personal injury.

CAUTION FOR CROSS HOLE DRILLING

- Decrease the feed rate when the drill head comes in contact with a cross hole ($f = 0.03 - 0.05 \text{ mm/rev}$)
- Retract the gundrill with a slow rotation ($n = 100 \text{ min}^{-1}$, $V_f = 300 \text{ mm/min}$)
- When the gundrill is rapidly pulled out without rotating, the insert and/or guide pads may come in contact with burrs on the cross holes on the way back, resulting in damages





Designed for cross hole drilling

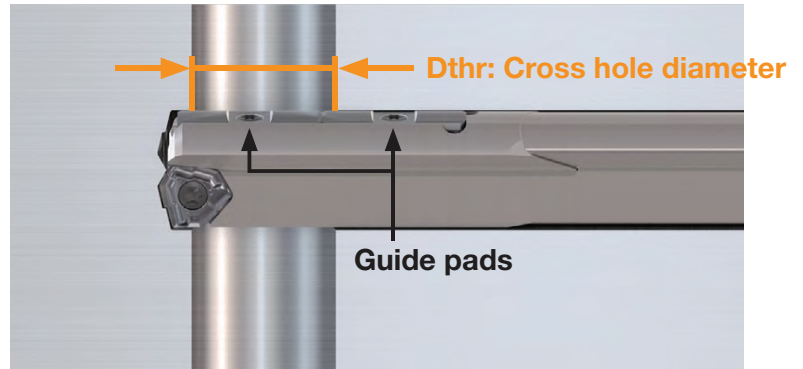

DEFORMATION BY CENTRIFUGAL FORCE

Every gundrill tool is prone to “whip” under certain circumstances. This phenomenon is fully dependent on tool length and cutting speed. If the parameters are in the deforming zone as shown in the graph, consider amending the cutting speed or using an anti-whip guide.

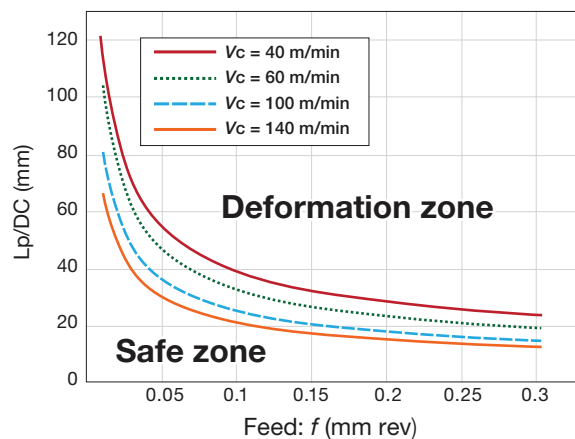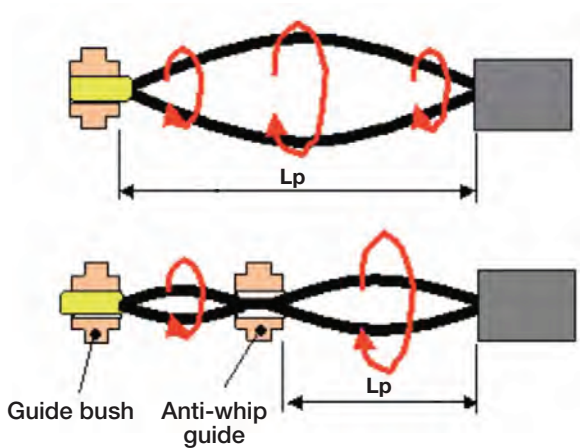

RECOMMENDED WHIP GUIDE SHAPE


A whip guide may be necessary for secure drilling.

A bearing and Gizmo® bush* is recommended for stable deep drilling.

Typical

Brass


Plastic

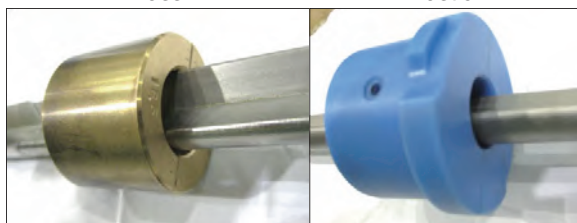

Gizmo® bush* is a trademark of The Whip Guide Company.

Recommendation

Bearing + Gizmo® bush*



⚠ Caution

Be sure to check that the drill head is twisted and can be attached to the whip guide.
($\phi 7.94 \leq \phi DC < \phi 10$)



Color of screws and its tightening direction are different for inserts and guide pads.
($\phi 7.94 \leq \phi DC < \phi 8.5$)


Screws for inserts

CSPB-2FL3.1














Screws for guide pads

CSPB-2FL2.7-LH



PRACTICAL EXAMPLES

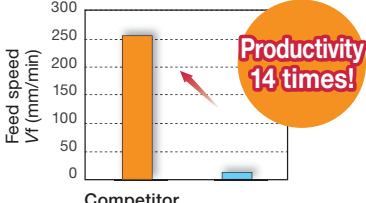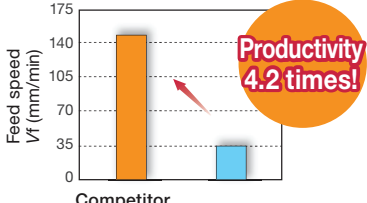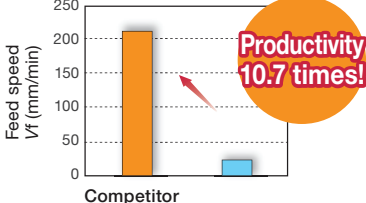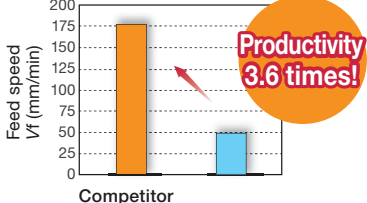Workpiece type		Mold	Mold
Drill		New MCUR8.00XM20-25	New CH-MCUR8.00XM20-20
Insert		ZSGT040104R-NDJ	ZSGT040104R-NDJ
Grade		UT-923	UT-923
Guide pad		SGP03-12-035-DC FH3125	SGP03-12-035-DC FH3125
Workpiece material		S50C / C50	SKD61 / X40CrMoV5-1
			
Cutting conditions	Cutting speed : Vc (m/min)	80	60
	Feed : f (mm/rev)	0.08	0.06
	Feed speed : Vf (mm/min)	255	143
	Hole diameter : DC (mm)	8	8
	Drilling depth : H (mm)	200	160
	Coolant	Wet	Wet
	Machine	Horizontal M/C	Vertical M/C
Results		 DeepTri-Drill provided 14 times productivity gain over competitor's gundrill. Also eliminated the need for regrinding, simplifying tool management.	 DeepTri-Drill provided 4.2 times higher productivity over competitor's HSS drill. It also offered smooth chip evacuation, eliminating peck-drilling required with HSS drills.
Workpiece type		Crankshaft	Mold
Drill		MCUR10.00XM20-25	MCUR11.50XM20-25
Insert		ZSGT060204R-NDJ	ZSGT060204R-NDJ
Grade		UT-923	UT-923
Guide pad		GP04-16-045-DC FH3125	GP04-16-050-DC FH3125
Workpiece material		Forged steel	S55C / C55
			
Cutting conditions	Cutting speed : Vc (m/min)	80	80
	Feed : f (mm/rev)	0.08	0.08
	Feed speed : Vf (mm/min)	204	177
	Hole diameter : DC (mm)	10	11.5
	Drilling depth : H (mm)	200	250
	Coolant	Wet	Wet
	Machine	Horizontal M/C	Horizontal M/C
Results		 DeepTri-Drill provided 10.7 times productivity gain over competitor's gundrill. Also eliminated the need for regrinding, simplifying tool management.	 DeepTri-Drill provided 3.6 times higher productivity over HSS drill. It also offered smooth chip evacuation, eliminating peck-drilling required with HSS drills.

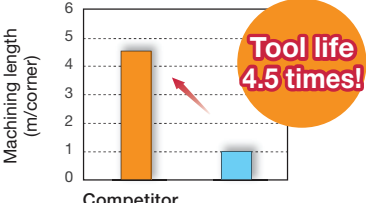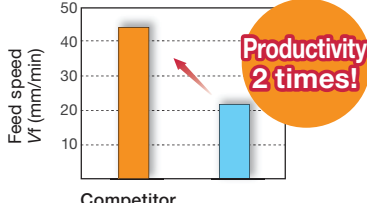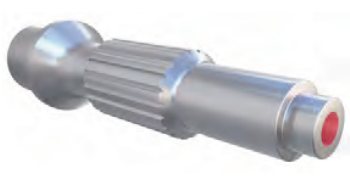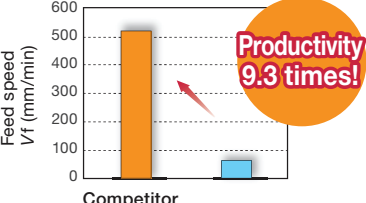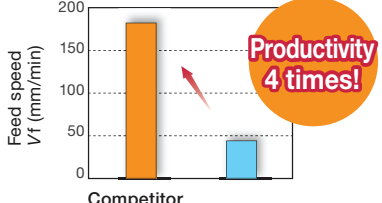Workpiece type		Tube sheet	Plastic mold
Drill		MCUR20.00XM32-10	CH-URLG18.00X1500-36A
Insert		TOHT090305R-NDL	TOHT080305R-NDJ
Grade		UT-925	UT-923
Guide pad		GP06-085 F2122	GP06-075 F2122
Workpiece material		SUS304 / X5CrNi18-9	SKD61 / X40CrMoV5-1 (45HRC)
			
Cutting conditions	Cutting speed : V_c (m/min)	80	62
	Feed : f (mm/rev)	0.04	0.04
	Feed speed : V_f (mm/min)	53	44
	Hole diameter : DC (mm)	20	18
	Drilling depth : H (mm)	200	700
	Coolant	Wet	Wet
Machine		Horizontal M/C	Horizontal M/C
Results		 The NDL style chipbreaker has improved chip control and provides stable machining. Extended tool life with machining stability.	 DeepTri-Drill has improved productivity and drilling stability with double the feed rate and eliminated premature tool failures. No need for regrinding worn drills, reducing tool inventory and management.
Workpiece type		Shaft	Axle shaft
Drill		MCUR12.00XM20-20	MCUR14.00XM25-15
Insert		LOGT060204R-NDJ	TOHT070304R-NDJ
Grade		UT-923	UT-923
Guide pad		GP04-055 F2122	GP05-060 F2122
Workpiece material		SCM420H	SCM435H
			
Cutting conditions	Cutting speed : V_c (m/min)	150	80
	Feed : f (mm/rev)	0.13	0.1
	Feed speed : V_f (mm/min)	517	182
	Hole diameter : DC (mm)	12	14
	Drilling depth : H (mm)	233	200
	Coolant	Wet	Wet
Machine		Vertical M/C	Lathe
Results		 DeepTri-Drill increases productivity by 9.3 times over the competitor's brazed gundrill. No need for reconditioning.	 Unlike the competitor's HSS drill, DeepTri-Drill does not require step feed and increases productivity by 4 times.